

Masoneilan™ 78400/18400 Series LincolnLog™

**High-pressure,
anti-cavitation
control valves**


**Integrated smart
engineered solutions
for severe service
applications**



Table of contents

| | |
|---|-------|
| Numbering System | 4 |
| Temperature Range/Seat Leakage..... | 4 |
| Ratings/Connections | 6 |
| Flow Capacity and F_L | 6 |
| Flow Characteristics..... | 7 |
| Trim Seat Protection..... | 7 |
| LincolnLog Trim Overlap Seat Protection Feature | 7 |
| Valve Sizing Guidelines | 8 |
| Staging Ratios & Pressure Drop Guidelines..... | 8 |
| Materials of Construction..... | 9-19 |
| Soft Seat Design..... | 20 |
| Dimensions (inches)..... | 21-23 |
| Dimensions (mm) | 24-26 |
| Weights (lbs)..... | 27-28 |
| Weights (kg) | 29-30 |
| Weights (lbs & kg) | 31 |
| Accessories and Options..... | 31 |

Numbering system

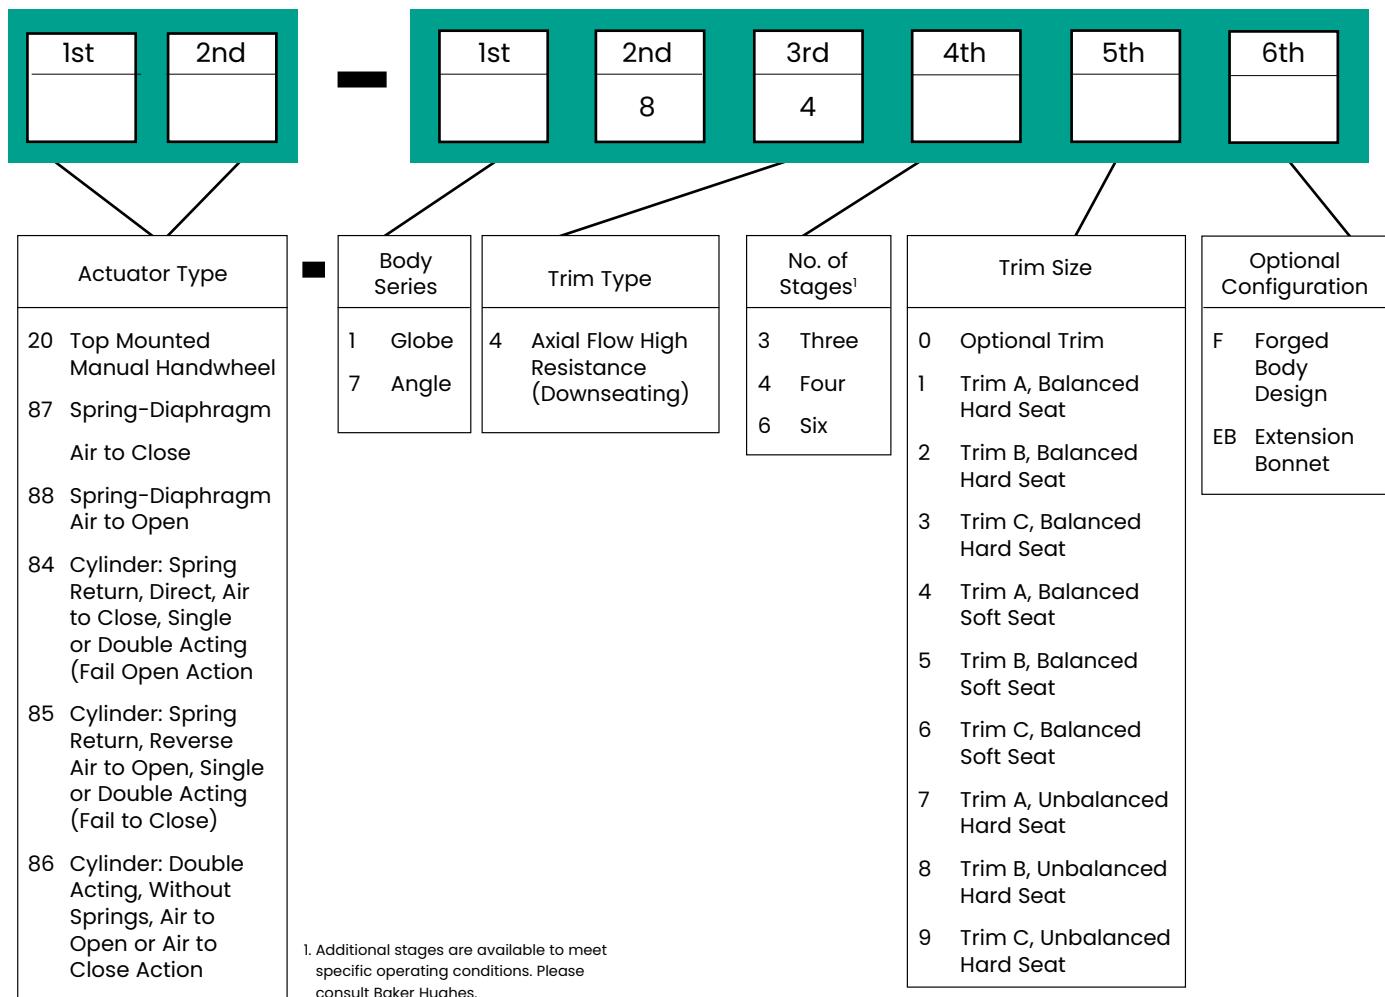

Temperature range/seat leakage

| Valve Sizes | | Trim Type | Seat Type | Temperature Range ¹ | | Seat Leakage Class ² | |
|-------------|-----------|------------------------|------------|--------------------------------|-------------------|---------------------------------|--|
| inches | DN | | | min. | max. ⁴ | | |
| 1 | 25 | Unbalanced | Metal Seat | -20°F (-29°C) | 600°F (316°C) | V ³ | |
| 1.5 to 8 | 40 to 200 | | Metal Seat | -20°F (-29°C) | 600°F (316°C) | | |
| | | | Metal Seat | -20°F (-29°C) | 600°F (316°C) | | |
| 2 to 8 | 50 to 200 | Balanced or Unbalanced | Soft Seat | -20°F (-29°C) | 450°F (232°C) | VI | |

1. Designs for higher or lower temperatures are available. Please consult Baker Hughes.


2. Seat leakage class ratings per IEC 534-4 and ASME/FCI 70.2. Class V seat leakage is standard and Class VI is optional.

3. Optional block valve tight shutoff per MSS-SP-61 also available.

4. Max. temp. limit of 600°F (316°C) with unbalanced trim requires use of optional flexible graphite packing or an extension bonnet.

Balance seal pressure and temperature limits

LincolnLog 78400/18400 Balance Seal Pressure-Temperature Application Range

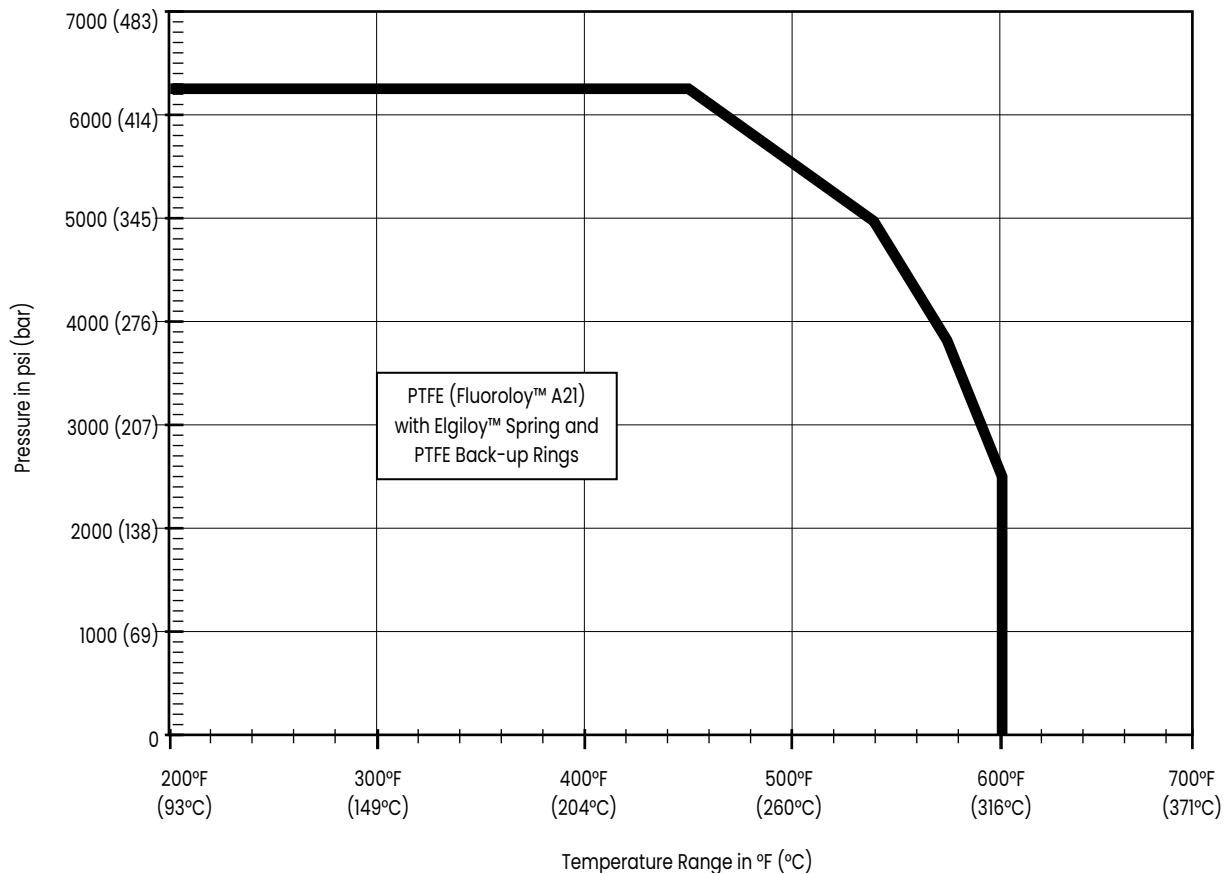

Ratings/connections

◆ RF Flanged □ Socket Weld △ Threaded ▲ RT Joint □ Butt Weld

| Valve Size ¹ | | Pressure Class ² | | | |
|-------------------------|---------|-----------------------------|---------|---------|---------|
| inches | DN | 600 | 900 | 1500 | 2500 |
| 1 & 1.5 | 25 & 40 | ◆ □ △ □ | ◆ □ △ □ | ◆ □ △ □ | ◆ □ △ □ |
| 2 | 50 | ◆ □ △ □ | ◆ □ △ □ | ◆ □ △ □ | ◆ □ △ □ |
| 3 | 80 | ◆ △ □ | ◆ △ □ | ◆ △ □ | ◆ △ □ |
| 4 | 100 | ◆ △ □ | ◆ △ □ | ◆ △ □ | ◆ △ □ |
| 6 | 150 | ◆ △ □ | ◆ △ □ | ◆ △ □ | ◆ △ □ |
| 8 | 200 | ◆ △ □ | ◆ △ □ | ◆ △ □ | ◆ △ □ |

1. Sizes, ratings and end connections are available in both globe and angle body styles.

2. Pressure classes shown represent ASME ratings and equivalent PN ratings.

Flow capacity and F_L

Standard Capacity – 3-Stage Design

Flow Characteristic: Modified Linear

| Valve Size | | Orifice Diameter | | Travel | | Trim C | | Min. Cont. C _V |
|------------|-----|------------------|------|--------|------|----------------|----------------|---------------------------|
| inches | DN | inches | mm | inches | mm | C _V | F _L | |
| 1 | 25 | .70 | 17.8 | .25 | 6.35 | 2.0 | .98 | .05 |
| 1.5 | 40 | 1.00 | 25.4 | .25 | 6.35 | 3.8 | .98 | .10 |
| 2 | 50 | 1.50 | 38.1 | .38 | 9.65 | 9.6 | .98 | .15 |
| 3 | 80 | 2.25 | 57.2 | .62 | 15.7 | 24.5 | .98 | .25 |
| 4 | 100 | 2.88 | 73.2 | .75 | 19.1 | 38 | .98 | .43 |
| 6 | 150 | 4.12 | 105 | 1.00 | 25.4 | 80 | .98 | .56 |
| 8 | 200 | 5.38 | 137 | 1.25 | 31.8 | 141.5 | .98 | 1.0 |

Standard Capacity – 4-Stage Design

Flow Characteristic: Modified Linear

| Valve Size | | Orifice Diameter | | Travel | | Trim A | | Trim B | | Trim C | | Min. Cont. C _V |
|------------|-----|------------------|------|--------|------|----------------|----------------|----------------|----------------|----------------|----------------|---------------------------|
| inches | DN | inches | mm | inches | mm | C _V | F _L | C _V | F _L | C _V | F _L | |
| 1 | 25 | .70 | 17.8 | .25 | 6.35 | 1.0 | .996 | 1.4 | .994 | 1.7 | .991 | .04 |
| 1.5 | 40 | 1.00 | 25.4 | .25 | 6.35 | 1.9 | .996 | 2.5 | .994 | 3.2 | .991 | .08 |
| 2 | 50 | 1.50 | 38.1 | .38 | 9.65 | 4.5 | .996 | 7 | .994 | 8.4 | .991 | .12 |
| 3 | 80 | 2.25 | 57.2 | .62 | 15.7 | 10 | .996 | 13 | .994 | 21 | .991 | .20 |
| 4 | 100 | 2.88 | 73.2 | .75 | 19.1 | 16.5 | .996 | 22 | .994 | 31.5 | .991 | .35 |
| 6 | 150 | 4.12 | 105 | 1.00 | 25.4 | 34 | .996 | 45 | .994 | 66 | .991 | .46 |
| 8 | 200 | 5.38 | 137 | 1.25 | 31.8 | 60 | .996 | 97.5 | .994 | 120 | .991 | .80 |

Standard Capacity – 6-Stage Design

Flow Characteristic: Modified Linear


| Valve Size | | Orifice Diameter | | Travel | | Trim A | | Trim B | | Trim C | | Min. Cont. C _V |
|------------|-----|------------------|------|--------|------|----------------|----------------|----------------|----------------|----------------|----------------|---------------------------|
| inches | DN | inches | mm | inches | mm | C _V | F _L | C _V | F _L | C _V | F _L | |
| 1 | 25 | .70 | 17.8 | .25 | 6.35 | .80 | .998 | 1.0 | .997 | 1.4 | .994 | .03 |
| 1.5 | 40 | 1.00 | 25.4 | .25 | 6.35 | 1.4 | .998 | 1.8 | .997 | 2.5 | .994 | .05 |
| 2 | 50 | 1.50 | 38.1 | .38 | 9.65 | 3.5 | .998 | 4.5 | .997 | 6.5 | .994 | .08 |
| 3 | 80 | 2.25 | 57.2 | .62 | 15.7 | 7.5 | .998 | 9.5 | .997 | 17 | .994 | .13 |
| 4 | 100 | 2.88 | 73.2 | .75 | 19.1 | 12 | .998 | 16 | .997 | 25 | .994 | .22 |
| 6 | 150 | 4.12 | 105 | 1.00 | 25.4 | 25 | .998 | 35 | .997 | 52 | .994 | .30 |
| 8 | 200 | 5.38 | 137 | 1.25 | 31.8 | 39 | .998 | 75.5 | .997 | 93 | .994 | .65 |

Flow characteristics

The LincolnLog trim provides a smooth modified linear control characteristic with "clearance flow" capacity over the initial 15 percent of valve travel as shown in the generic chart and table at right.

Incorporation of the multi-stage "clearance flow" design concept prevents high pressure drops across the LincolnLog seating area while throttling at low lifts. This feature helps to extend trim life significantly, resulting in dependable and tight shutoff whenever required. It also improves the throttling control stability and performance at low lifts, while providing smooth, accurate and continuous capacity control from 15 percent to 100 percent plug travel. Controllability extends from the Maximum Rated C_v to the Minimum Controllable C_v for any valve size resulting in typical turndown ratios of 50:1.

LincolnLog C_v vs. Travel

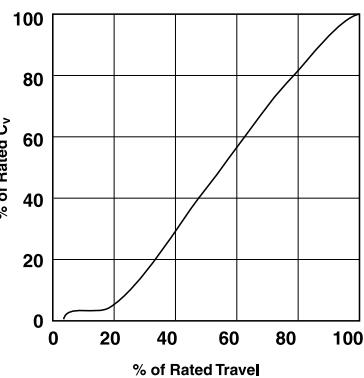


| | | | | | | | | | | | |
|----------------------|---|----|----|----|----|----|----|----|----|----|-----|
| Percent Max. Opening | 5 | 10 | 20 | 30 | 40 | 50 | 60 | 70 | 80 | 90 | 100 |
| Percent Max. C | • | • | 3 | 15 | 27 | 39 | 52 | 64 | 76 | 88 | 100 |

• Clearance Flow Only

Trim seat protection

The "clearance flow" feature described in the previous section is achieved through the trim overlap design illustrated below:

LincolnLog Trim Overlap Seat Protection Feature

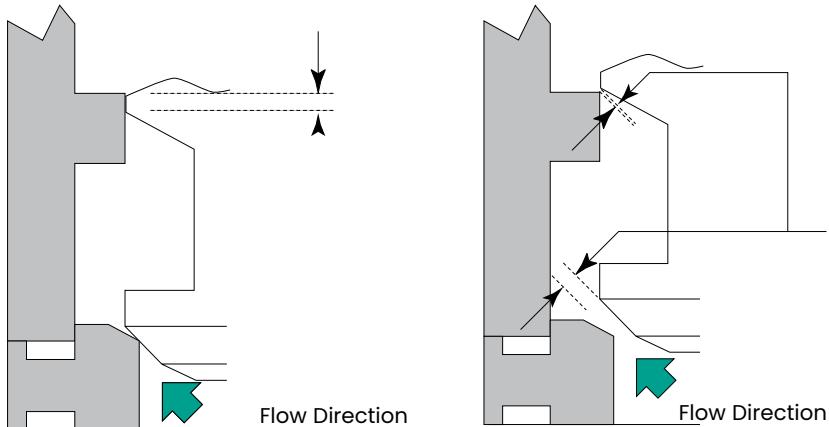

0 - 15 percent of Plug Travel

Trim overlap with the valve in the closed or low lift positions.

15 - 100 percent of Plug Travel

There is much greater flow area through the valve seat versus the plug notches. As a result, pressure drop and velocities across the critical seating surfaces are controlled eliminating seat damage.

Valve sizing guidelines

General

LincolnLog multi-stage control valves can be sized using either standard IEC/ISA equations or using Baker Hughes latest Masoneilan sizing and selection software program.

Noise Predictions

Valve noise calculations can be performed using the Baker Hughes Masoneilan sizing and selection program based on the latest IEC equations. The serial stage construction of the LincolnLog design helps to significantly reduce trim noise. Calculating the noise at the last stage of the LincolnLog trim will closely approximate the overall valve noise produced. Pressure drop across the last stage can be derived from the table below and used in the noise calculations.

Trim Selection

As indicated in the table below, the LincolnLog is available in various standard trim types and number of stages. Each trim style provides different staging ratios and different pressure drop percentages per stage. Recommended limits for ΔP per stage are 800 psi (60 bar) for continuous duty cycle applications and up to 1000 psi (70 bar) ΔP per stage for intermittent service. The recommended operating throttling ΔP limits are also shown in the table below.

Engineered Solutions

For flashing service, the expansion ratio of the fluid will determine the appropriate staging ratio to apply. Non-standard staging ratios can be supplied for compressible two-phase flow or flashing conditions not covered by the standard trim. Please consult Baker Hughes for proper sizing and design of engineered solutions for these types of applications.

Staging ratios and pressure drop guidelines


| Trim Type | No. of Stages | Staging Ratios ^{1&2} | Pressure Drop per Stage ³ | | Maximum Recommended Throttling ΔP | | | |
|-----------|---------------|-----------------------------------|--------------------------------------|------------------------------|---|-----|----------------------|-----|
| | | | Stages | Fraction of Total ΔP | Continuous Service | | Intermittent Service | |
| | | | | | psi | bar | psi | bar |
| C | 3 | 1-1-2 | 1 to 2 | .44 | 1595 | 110 | 2030 | 140 |
| | | | 3 | .11 | | | | |
| C | 4 | 1-1-1-2 | 1 to 3 | .31 | 2248 | 155 | 2900 | 200 |
| | | | 4 | .08 | | | | |
| B | 4 | 1-1-2-3 | 1 to 2 | .42 | 1885 | 130 | 2320 | 160 |
| | | | 3 | .11 | | | | |
| | | | 4 | .05 | | | | |
| A | 4 | 1-1-2-4 | 1 to 2 | .43 | 1885 | 130 | 2320 | 160 |
| | | | 3 | .11 | | | | |
| | | | 4 | .03 | | | | |
| C | 6 | 1-1-1-1-2 | 1 to 5 | .19 | 3698 | 255 | 4713 | 325 |
| | | | 6 | .05 | | | | |
| B | 6 | 1-1-1-1-2-3 | 1 to 4 | .23 | 3480 | 240 | 4350 | 300 |
| | | | 5 | .06 | | | | |
| | | | 6 | .025 | | | | |
| A | 6 | 1-1-1-1-2-4 | 1 to 4 | .23 | 3408 | 235 | 4278 | 295 |
| | | | 5 | .06 | | | | |
| | | | 6 | .014 | | | | |

1. Staging ratios provide approximations of the relative area ratios for each specific trim type. As an example, a staging ratio of 1-1-2 indicates that the final stage for that trim type has approximately twice the area of the first two stages.

2. Staging ratios do not have any relative correlation between the different trim types.


3. Recommended limits for ΔP per stage are 800 psi (60 bar) for continuous duty cycle applications and up to 1000 psi (70 bar) ΔP per stage for intermittent service.

Materials of construction

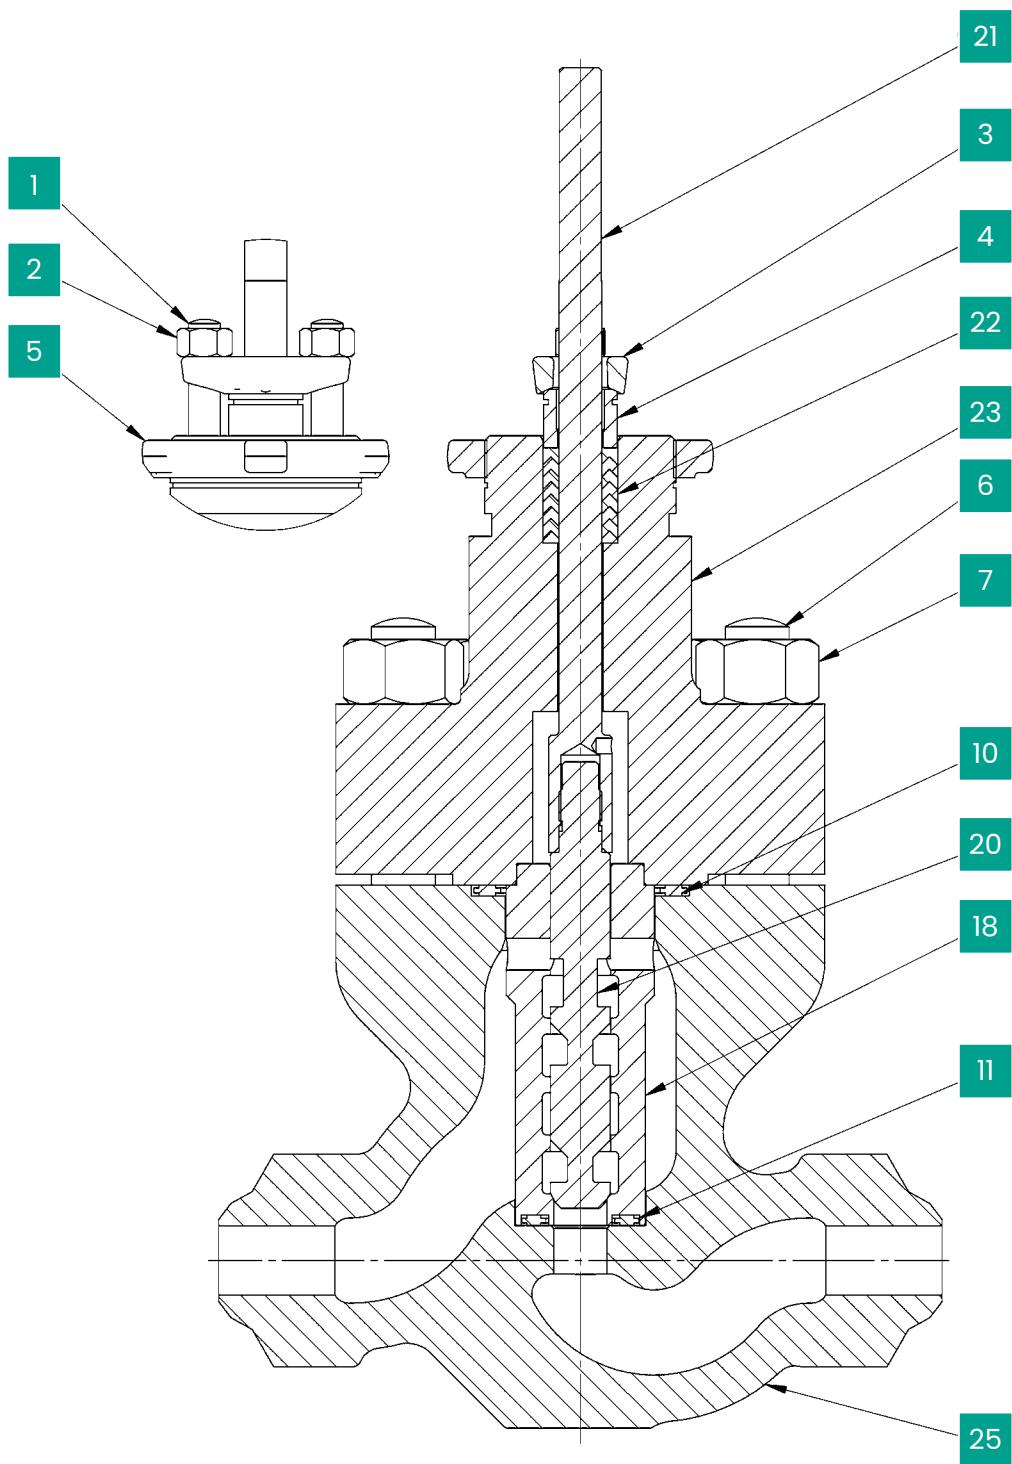

1" Size Unbalanced Assembly

Materials of construction

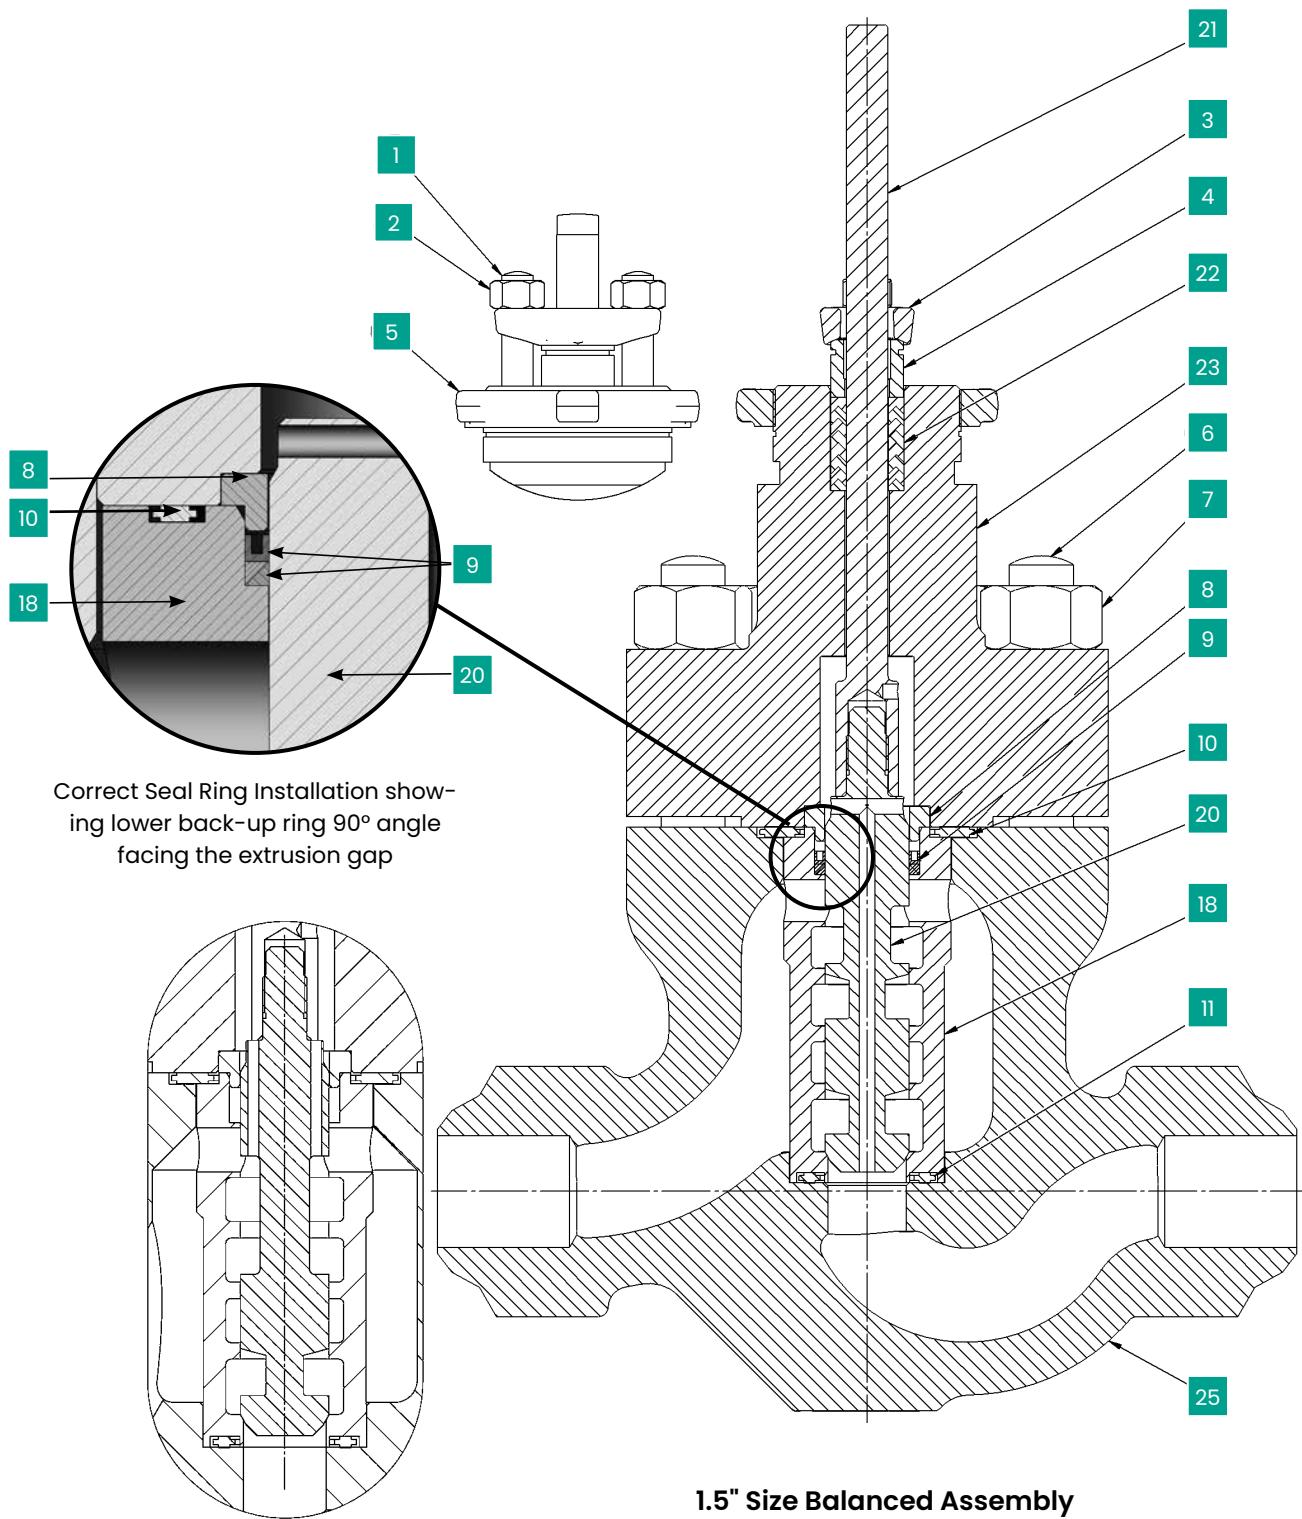

Materials of construction

Standard Construction

Valve Sizes 1" and 1.5" (DN 25 and 40)¹

| Ref. No. | Temperature Range | -20°F | 450°F | 600°F |
|----------|---|---------|---|-----------|
| | Description | ▽ | Standard Materials | ▽ |
| 1 | Packing Flange Stud | | 304 St. St. ASTM A193 GR B8 Class 2 | |
| 2 | Packing Flange Nut | | 304 St. St. ASTM A194 GR 8 | |
| 3 | Packing Flange | | Carbon Steel ASTM A668 CL B or ASTM A216 GR WCC | |
| 4 | Packing Follower | | Austenitic 300 Series Stainless Steel | |
| 5 | Drive Nut | | Carbon Steel SAE 1117 or ASTM A216 GR WCC | |
| 6 | Body Stud | | Alloy Steel ASTM A193 GR B7 | |
| 7 | Body Stud Nut | | Carbon Steel ASTM A194 GR 2H | |
| 8 | Seal Retainer ² | | 316 St. St. ASTM A479 TY 316 | |
| 9 | Balance Seal and Back-up Rings ^{3 & 4} | | PTFE (Fluoropoly™ A21) with Elgiloy Spring and PTFE Back-up Rings | |
| 10 | Body Gasket | | 316L St. St. w/Flexible Graphite Filler (Spiral Wound) | |
| 11 | Seat Ring Gasket | | 316L St. St. w/Flexible Graphite Filler (Spiral Wound) | |
| 12 | Plug Pin (Not Shown) | | Austenitic 300 Series Stainless Steel | |
| 18 | Liner with Integral Seat | | 17-4 PH St. St. ASTM A564 GR 630 Cond. H900 | |
| 20 | Plug | | 410 St. St. ASTM A479 | |
| 21 | Stem | | 17-4 PH St. St. ASTM A564 GR 630 Cond. H1075 | |
| 22 | Packing | | TFE V-Ring with Std. Bonnet | |
| | | | TFE V-Ring with Ext. Bonnet | |
| 23 | Valve Bonnet | | Carbon Steel ASTM A216 Grade WCC | |
| 25 | Valve Body | | Carbon Steel ASTM A216 Grade WCC or ASTM A105 (Forging) | |
| Ref. No. | Temperature Range | △ -29°C | △ 232°C | △ 316°C △ |

1. 1" (DN 25) valve size is only available in the unbalanced configuration.

2. The seal retainer is not required for the 1" (DN 25) size.

3. The balance seal is not required for the unbalanced construction.

4. See Page 4 for balance seal pressure and temperature limits.

 Review use of optional materials and configurations for temperature ranges indicated. Standard materials listed may still be applicable depending on specific service conditions. Consult Baker Hughes for appropriate material combinations.

Materials of construction


Standard NACE (1) Construction Valve Sizes 1" and 1.5" (DN 25 and 40)²


| Ref. No. | Temperature Range | -20°F | Standard Materials | 450°F | 600°F |
|----------|---|---------|--|---------|---------|
| | Description | ▽ | | ▽ | ▽ |
| 1 | Packing Flange Stud | | 304 St. St. ASTM A193 GR B8 Class 2 | | |
| 2 | Packing Flange Nut | | 304 St. St. ASTM A194 GR 8 | | |
| 3 | Packing Flange | | Carbon Steel ASTM A668 CL B or ASTM A216 GR WCC | | |
| 4 | Packing Follower | | Austenitic 300 Series Stainless Steel | | |
| 5 | Drive Nut | | Carbon Steel SAE II117 or ASTM A216 GR WCC | | |
| 6 | Body Stud | | Alloy Steel ASTM A193 GR B7 | | |
| 7 | Body Stud Nut | | Carbon Steel ASTM A194 GR 2H | | |
| 8 | Seal Retainer ² | | 316 St. St. ASTM A479 TY 316 | | |
| 9 | Balance Seal and Back-up Rings ^{3 & 4} | | PTFE (Fluoroly A21) with Elgiloy Spring and PTFE Back-up Rings | | |
| 10 | Body Gasket | | 316L St. St. w/Flexible Graphite Filler (Spiral Wound) | | |
| 11 | Seat Ring Gasket | | 316L St. St. w/Flexible Graphite Filler (Spiral Wound) | | |
| 12 | Plug Pin (Not Shown) | | Austenitic 300 Series Stainless Steel | | |
| 18 | Liner with Integral Seat | | Nitronic 50 ASTM A479 TY XM-19 | | |
| 20 | Plug | | 17-4 PH St. St. ASTM A564 GR 630 Cond. H1150M | | |
| 21 | Stem | | Nitronic 50 ASTM A479 TY XM-19 | | |
| 22 | Packing | | TFE V-Ring with Std. Bonnet | | |
| | | | TFE V-Ring with Ext. Bonnet | | |
| 23 | Valve Bonnet | | Carbon Steel ASTM A216 Grade WCC | | |
| 25 | Valve Body | | Carbon Steel ASTM A216 Grade WCC or ASTM A105 (Forging) | | |
| Ref. No. | Temperature Range | △ -29°C | | △ 232°C | 316°C △ |

1. Standard materials and processes are in accordance with the requirements of NACE specification MR0103. Applications requiring compliance to MR0175 – 2003 or ISO 15156 would need to be reviewed by Baker Hughes.
2. 1" (DN 25) valve size is only available in the unbalanced configuration.
3. The seal retainer is not required for the 1" (DN 25) size.
4. The balance seal is not required for the unbalanced construction.
5. See Page 4 for balance seal pressure and temperature limits.


 Review use of optional materials and configurations for temperature ranges indicated. Standard materials listed may still be applicable depending on specific service conditions. Consult Baker Hughes for appropriate material combinations.

Materials of construction

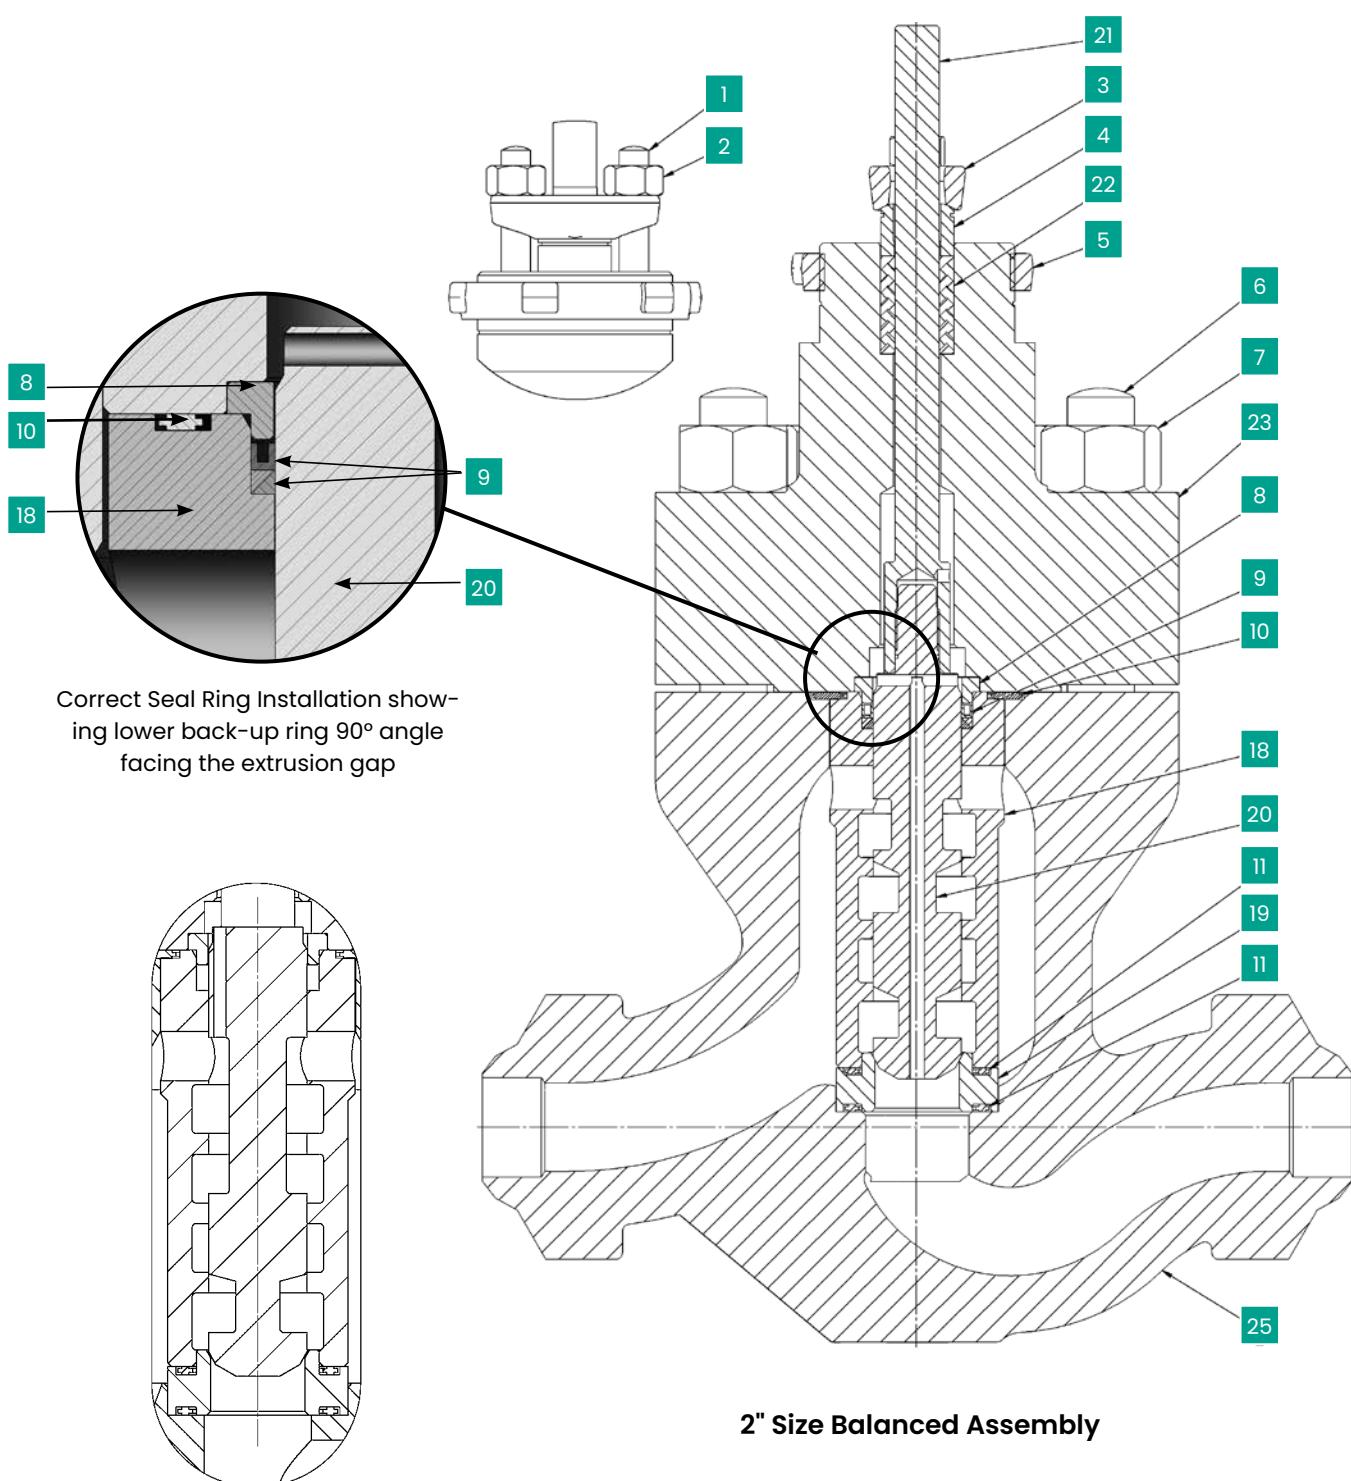


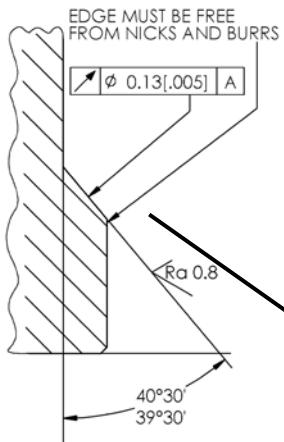


Bonnet Seating Angle Detail

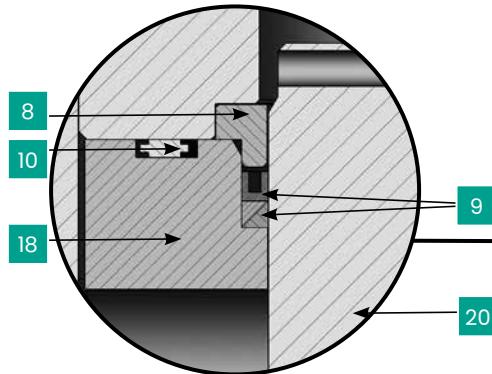


Correct Seal Ring Installation showing lower back-up ring 90° angle facing the extrusion gap

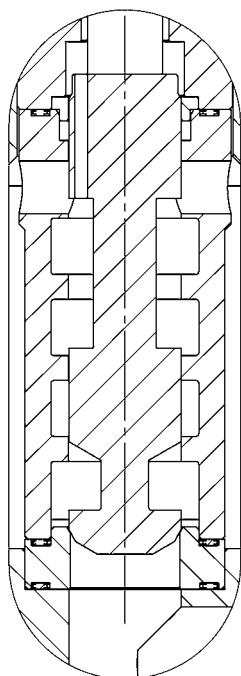

3" to 8" Size Unbalanced Trim Detail

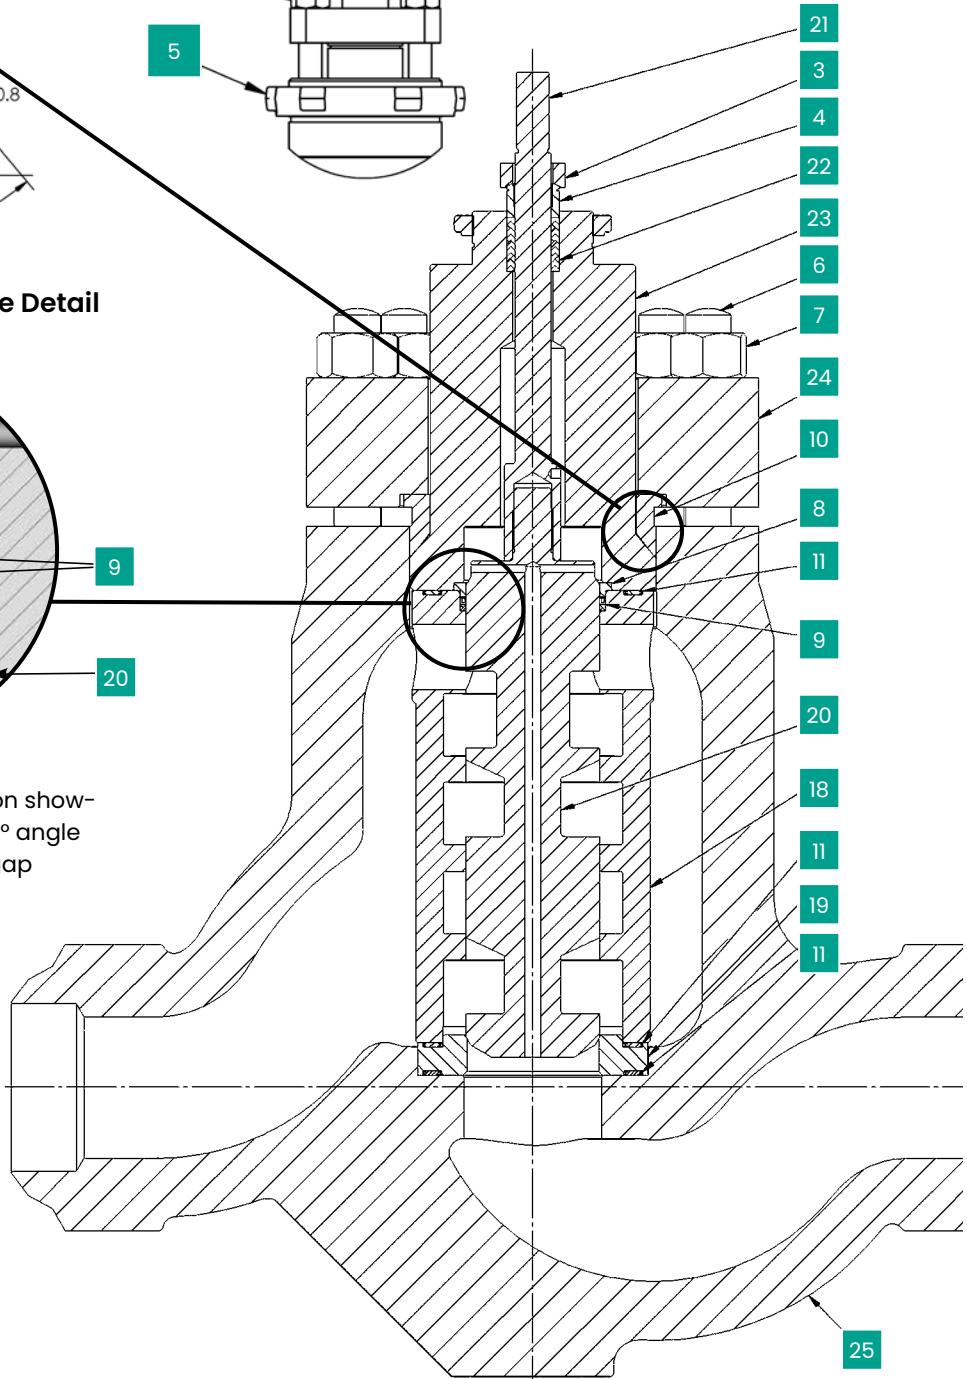

3" to 8" Size Balanced Assembly

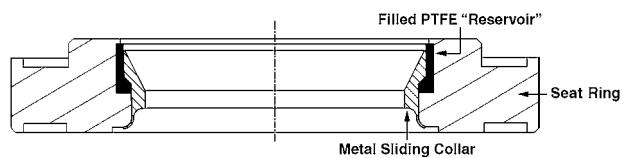

Soft Seat Option

Materials of construction

Standard Construction

Valve Sizes 2" and 8" (DN 50 and 200)

| Ref. No. | Temperature Range | -20°F | | 450°F | 600°F |
|----------|---|---------|---|---------|---------|
| | Description | ▼ | Standard Materials | ▼ | ▼ |
| 1 | Packing Flange Stud | | 304 St. St. ASTM A193 GR B8 Class 2 | | |
| 2 | Packing Flange Nut | | 304 St. St. ASTM A194 GR 8 | | |
| 3 | Packing Flange | | Carbon Steel ASTM A668 CL B or ASTM A216 GR WCC | | |
| 4 | Packing Follower | | Austenitic 300 Series Stainless Steel | | |
| 5 | Drive Nut | | Carbon Steel SAE 1117 or ASTM A216 GR WCC | | |
| 6 | Body Stud | | Alloy Steel ASTM A193 GR B7 | | |
| 7 | Body Stud Nut | | Carbon Steel ASTM A194 GR 2H | | |
| 8 | Seal Retainer ² | | 316 St. St. ASTM A479 TY 316 | | |
| 9 | Balance Seal and Back-up Rings ^{3&4} | | PTFE (Fluoroloy A21) with Elgiloy Spring and PTFE Back-up Rings | | |
| 10 | Body Gasket ³ (2" Size) | | 316L St. St. w/Flexible Graphite Filler (Spiral Wound) | | |
| | Metal Seal ⁴ (3" to 8" Sizes) | | 17-4 PH St. St. ASTM A564 GR 630 Cond. H1150M | | |
| 11 | Seat Ring Gasket | | 316L St. St. w/Flexible Graphite Filler (Spiral Wound) | | |
| 12 | Plug Pin (Not Shown) | | Austenitic 300 Series Stainless Steel | | |
| 18 | Liner | | 17-4 PH St. St. ASTM A564 GR 630 Cond. H900 | | |
| 19 | Seat Ring | | 316 St. St. ASTM A479 TY 316 with Hardfaced Seat | | |
| 20 | Plug | | 410 St. St. ASTM 479 | | |
| 21 | Stem | | 17-4 PH St. St. ASTM A564 GR 630 Cond. H1075 | | |
| 22 | Packing | | TFE V-Ring with Std. Bonnet | | |
| | | | TFE V-Ring with Ext. Bonnet | | |
| 23 | Valve Bonnet ³ | | Carbon Steel ASTM A216 Grade WCC | | |
| 24 | Bonnet Flange ⁴ (3" to 8" Sizes) | | Carbon Steel ASTM A216 Grade WCC | | |
| 25 | Valve Body | | Carbon Steel ASTM A216 Grade WCC or ASTM A105 (Forging) | | |
| Ref. No. | Temperature Range | △ -29°C | | △ 232°C | 316°C △ |

1. The balance seal is not required for the unbalanced construction.

2. See Page 4 for balance seal pressure and temperature limits.

3. 2" size valve bonnet includes an integral flange and requires a bonnet gasket.

4. 3" to 8" size valves use separate bonnet flanges and a metal seal joint design.

 Review use of optional materials and configurations for temperature ranges indicated. Standard materials listed may still be applicable depending on specific service conditions. Consult Baker Hughes for appropriate material combinations.

Materials of construction

Standard NACE¹ Construction Valve Sizes 2" and 8" (DN 50 and 200)

| Ref. No. | Temperature Range | -20°F | | 450°F | 600°F |
|----------|---|---------|---|---------|---------|
| | Description | ▼ | Standard Materials | ▼ | ▼ |
| 1 | Packing Flange Stud | | 304 St. St. ASTM A193 GR B8 Class 2 | | |
| 2 | Packing Flange Nut | | 304 St. St. ASTM A194 GR 8 | | |
| 3 | Packing Flange | | Carbon Steel ASTM A668 CL B or ASTM A216 GR WCC | | |
| 4 | Packing Follower | | Austenitic 300 Series Stainless Steel | | |
| 5 | Drive Nut | | Carbon Steel SAE 1117 or ASTM A216 GR WCC | | |
| 6 | Body Stud | | Alloy Steel ASTM A193 GR B7 | | |
| 7 | Body Stud Nut | | Carbon Steel ASTM A194 GR 2H | | |
| 8 | Seal Retainer ² | | 316 St. St. ASTM A479 TY 316 | | |
| 9 | Balance Seal and Back-up Rings ^{3&4} | | PTFE (Fluoroloy A21) with Elgiloy Spring and PTFE Back-up Rings | | |
| 10 | Body Gasket ³ (2" Size) | | 316L St. St. w/Flexible Graphite Filler (Spiral Wound) | | |
| | Metal Seal ⁴ (3" to 8" Sizes) | | 17-4 PH St. St. ASTM A564 GR 630 Cond. H1150M | | |
| 11 | Seat Ring Gasket | | 316L St. St. w/Flexible Graphite Filler (Spiral Wound) | | |
| 12 | Plug Pin (Not Shown) | | Austenitic 300 Series Stainless Steel | | |
| 18 | Liner | | Nitronic 50 ASTM A479 TY XM-19 | | |
| 19 | Seat Ring | | 316 St. St. ASTM A479 TY 316 with Hardfaced Seat | | |
| 20 | Plug | | 17-4 PH St. St. ASTM A564 GR 630 Cond. H1150M | | |
| 21 | Stem | | Nitronic 50 ASTM A479 TY XM-19 | | |
| 22 | Packing | | TFE V-Ring with Std. Bonnet | | |
| | | | TFE V-Ring with Ext. Bonnet | | |
| 23 | Valve Bonnet ³ | | Carbon Steel ASTM A216 Grade WCC | | |
| 24 | Bonnet Flange ⁴ (3" to 8" Sizes) | | Carbon Steel ASTM A216 Grade WCC | | |
| 25 | Valve Body | | Carbon Steel ASTM A216 Grade WCC or ASTM A105 (Forging) | | |
| Ref. No. | Temperature Range | △ -29°C | | △ 232°C | 316°C ▲ |

1. Standard materials and processes are in accordance with the requirements of NACE specification MR0103. Applications requiring compliance to MR0175 - 2003 or ISO 15156 would need to be reviewed by Baker Hughes.

2. The balance seal is not required for the unbalanced construction.

3. See Page 4 for balance seal pressure and temperature limits.


4. 2" size valve bonnet includes an integral flange and requires a bonnet gasket.

5. 3" to 8" size valves use separate bonnet flanges and a metal seal joint design.

 Review use of optional materials and configurations for temperature ranges indicated. Standard materials listed may still be applicable depending on specific service conditions. Consult Baker Hughes for appropriate material combinations.

Materials of construction

Cryogenic Service Configuration

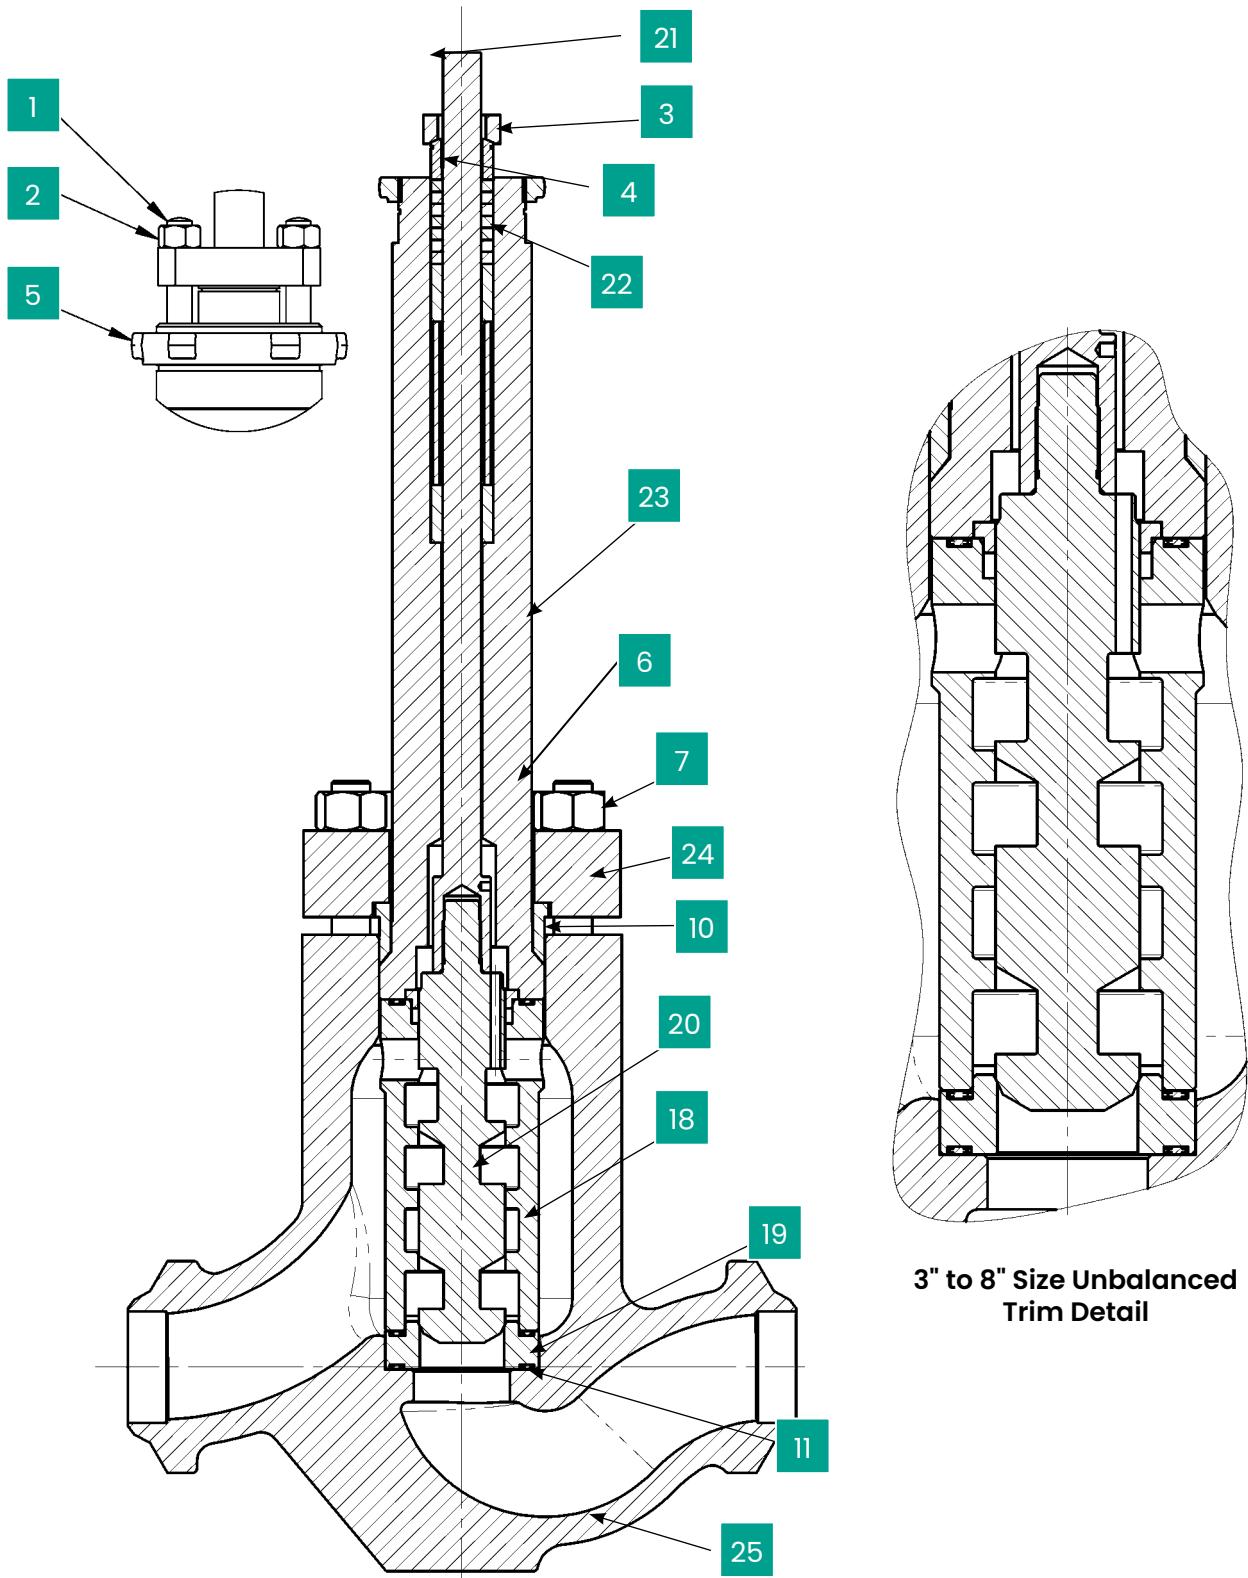

Materials of construction

Cryogenic Service Configuration

18400/78400 Series Anti-Cavitation Control Valve

Valve Sizes 1" to 1.5" (DN 25 and 40)

| Ref. No. | Description | Standard Materials |
|----------|--------------------------|---|
| 1 | Packing Flange Stud | 304 Stainless Steel ASTM A193 Gr B8 Class 2 |
| 2 | Packing Flange Nut | 304 Stainless Steel ASTM A194 Gr 8 |
| 3 | Packing Flange | Austenitic 300 Series Stainless Steel |
| 4 | Packing Follower | Austenitic 300 Series Stainless Steel |
| 5 | Drive Nut | Carbon Steel SAE II117 or ASTM A216 Gr WCC with ENP |
| 6 | Valve Body Stud | 304 Stainless Steel ASTM A193 Gr B8 Class 2 |
| 7 | Valve Body Nut | 304 Stainless Steel ASTM A194 Gr 8 |
| 10 | Body Gasket | 316L St. St. w/ Flexible Graphite Filler (Spiral Wound) |
| 11 | Seat Ring Gasket | 316L St. St. w/ Flexible Graphite Filler (Spiral Wound) |
| 12 | Plug Pin (Not Shown) | Austenitic 300 Series Stainless Steel |
| 18 | Liner with Integral Seat | 316 Stainless Steel ASTM A479 TY 316 with Chrome-Plate and Hardfaced Seat |
| 20 | Plug | 316 Stainless Steel ASTM A479 TY 316 with Hardfacing Nitronic 50 with Hardfaced Seat |
| 21 | Plug Stem | 316 Stainless Steel ASTM A479 TY 316 Inconel X-750 ASTM B637 Gr 688 |
| 22 | Packing | Teflon V-Ring |
| 23 | Valve Bonnet | 316 Stainless Steel ASTM A351 Gr CF8M |
| 25 | Valve Body | 316 Stainless Steel ASTM A351 Gr CF8M |

Valve Sizes 2" to 8" (DN 50 and 400)

| Ref. No. | Description | Standard Materials |
|----------|--|--|
| 1 | Packing Flange Stud | 304 Stainless Steel ASTM A193 Gr B8 Class 2 |
| 2 | Packing Flange Nut | 304 Stainless Steel ASTM A194 Gr 8 |
| 3 | Packing Flange | Austenitic 300 Series Stainless Steel |
| 4 | Packing Follower | Austenitic 300 Series Stainless Steel |
| 5 | Drive Nut | Carbon Steel SAE II117 or ASTM A216 Gr WCC with ENP |
| 6 | Valve Body Stud | 304 Stainless Steel ASTM A193 Gr B8 Class 2 |
| 7 | Valve Body Nut | 304 Stainless Steel ASTM A194 Gr 8 |
| 10 | Body Gasket (2" Size) Metal Seal (3" to 8" Sizes) | 316L St. St. w/ Flexible Graphite Filler (Spiral Wound) A286 Super Alloy ASTM A638 Gr 660 |
| 11 | Seat Ring Gasket | 316L St. St. w/ Flexible Graphite Filler (Spiral Wound) |
| 12 | Plug Pin (Not Shown) | Austenitic 300 Series Stainless Steel |
| 18 | Liner | 316 Stainless Steel ASTM A479 TY 316 with Chrome-Plate |
| 19 | Seat Ring | 316 Stainless Steel ASTM A479 TY 316 with Hardfaced Seat |
| 20 | Plug | 316 Stainless Steel ASTM A479 TY 316 with Hardfacing Nitronic 50 with Hardfaced Seat |
| 21 | Plug Stem | 316 Stainless Steel ASTM A479 TY 316 Inconel X-750 ASTM B637 Gr 688 |
| 22 | Packing | Teflon V-Ring |
| 23 | Valve Bonnet | 316 Stainless Steel ASTM A351 Gr CF8M |
| 24 | Bonnet Flange (3" to 8" Sizes) | 316 Stainless Steel ASTM A351 Gr CF8M |
| 25 | Valve Body | 316 Stainless Steel ASTM A351 Gr CF8M |

1. Materials focused for cryogenic LNG applications (-196°C). Consult factory for suitability in other cryogenic applications.

2. Consult factory for NACE applications.

3. Trim offerings limited to unbalanced designs.

4. Consult factory for proper actuator sizing to provide correct valve shut-off.

5. JIS and EN equivalents available.

Materials of construction

78400/18400 Series Optional Materials

| Ref. No. | Temperature Range | -20°F | | 450°F | 600°F |
|----------|--------------------------------|---------|--|---------|---------|
| | Description | ▼ | Standard Materials | ▼ | ▼ |
| 19 | Soft Seat S/A (2" to 8" Sizes) | | See Below | | |
| 19A | Seat Ring | | Standard - 17-4 PH St. St. ASTM A564 GR 630 Cond. H1075 | | |
| | | | NACE - 17-4 PH St. St. ASTM A564 GR 630 Cond. H1150M | | |
| 19B | Soft Seat Insert | | Glass Reinforced PTFE (Fluorogold™) | | |
| 19C | Sliding Collar | | Standard - 17-4 PH St. St. ASTM A564 GR 630 Cond. H1075 | | |
| | | | NACE - 17-4 PH St. St. ASTM A564 GR 630 Cond. H1150M | | |
| 20 | Plug ² | | 440B or 440C St. St. ASTM A276 | | |
| 22 | Packing ³ | | Low-E Packing ⁴ | | |
| | | | PTFE with Carbon Fiber | | |
| | | | Flexible Graphite | | |
| 23 | Valve Bonnet ⁵ | | 316 St. St. ASTM A351 GR CF8M | | |
| | | | Chrome-Moly Steel ASTM A217 GR WC9 | | |
| 25 | Valve Body ⁵ | | 316 St. St. ASTM A351 GR CF8M or ASTM A182 GR F316 (Forging) | | |
| | | | Chrome-Moly Steel ASTM A217 GR WC9 or ASTM A182 GR F22 (Forging) | | |
| Ref. No. | Temperature Range | △ -29°C | | △ 232°C | 316°C ▲ |

1. Consult Baker Hughes for material combinations for temperatures below -20°F (-29°C) or above 600°F (316°C).
2. Optional plug designs using hardened 440B or 440C requires stems with male threads and plugs with female threads.
3. Teflon-based packing can also be applied up to 600°F (316°C) with an extension bonnet.
4. Low-E Packing for low emissions applications is limited to maximum operating pressure of 1500 psig (104 bar).
5. Consult factory for trim material requirements for 316 St. St. body and bonnet assemblies relative to application service conditions.

 Review use of optional materials and configurations for temperature ranges indicated. Standard materials listed may still be applicable depending on specific service conditions. Consult Baker Hughes for appropriate material combinations.

Other Optional Materials¹

| Ref. No. | Temperature Range | -20°F | | 600°F |
|----------|--|---------|---|---------|
| | Description | ▼ | Optional Materials | ▼ |
| 18 | Liner ² or Liner with Integral Seat | | Ferralium™ 255 ASTM A479 Duplex St. Steel | |
| | | | 316 St. St. ASTM A479 TY316 with Boronizing | |
| | | | 410 St. St. ASTM A479 TY410 with Boronizing | |
| 19 | Seat Ring ³ | | Ferralium 255 ASTM A479 Duplex St. Steel | |
| | | | 316 St. St. ASTM A479 TY316 with Boronizing | |
| | | | 410 St. St. ASTM A479 TY410 with Boronizing | |
| 20 | Plug ⁴ | | Inconel 718 ASTM B637 GR 7178 | |
| | | | 316 St. St. ASTM A479 TY316 with Boronizing | |
| | | | 410 St. St. ASTM A479 TY410 with Boronizing | |
| 21 | Stem | | Nitronic 50 ASTM A479 TY XM-19 | |
| Ref. No. | Temperature Range | △ -29°C | | 316°C ▲ |


1. Listed are typical optional materials for refining applications, including sour water letdown, cold high-pressure liquid letdown, and amine service.
2. Material noted is recommended for the separate liner (2" to 8" sizes) or the liner with integral seat ring (1" and 1.5" sizes).
3. The standard 316 St. St. hard-faced seat ring can be applied in most of the refining applications noted except for amine service. Ferralium 255 is recommended for the separate seat ring in amine service.
4. Some material combinations may require electroless nickel or hard chrome plating to prevent galling. Consult factory for specific requirements.

Soft seat design

The LincolnLog is available with an optional soft seat design in valve sizes 2" to 8" (DN 50 to DN 200) providing bubble tight Class VI shutoff seat leakage. This soft seat design includes a patented sliding metal collar feature as shown below.


The metal collar holds the PTFE soft seat element in place and prevents it from extruding out during operation. Fluid pressure acts to push the collar up to protect the

elastomer seat as the valve is throttling. As the valve plug returns to the closed position, it moves the metal collar down to expose the filled PTFE "Reservoir" creating the soft seat interface. Combined with the LincolnLog trim overlap feature, the soft seat design will provide long-term dependable tight shutoff with minimal maintenance. The filled PTFE "Reservoir" will also compensate for any potential wear in the seating surfaces.

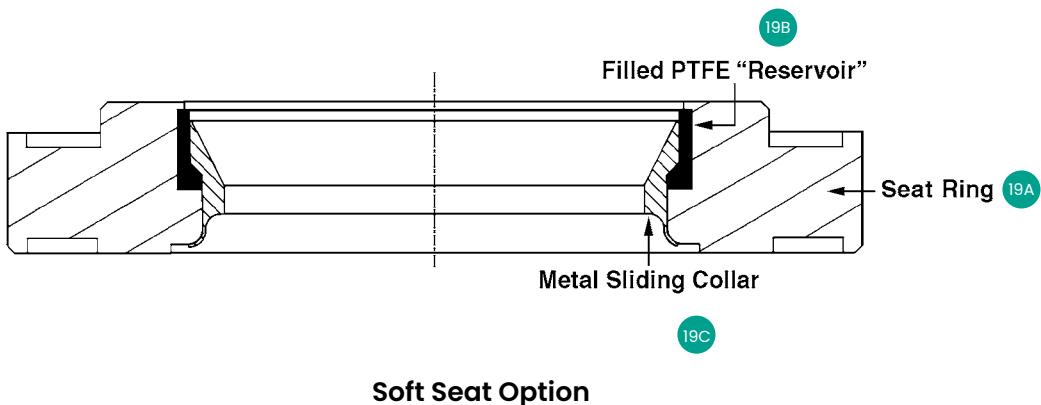


Dimensions (inches)

Cast Globe Style

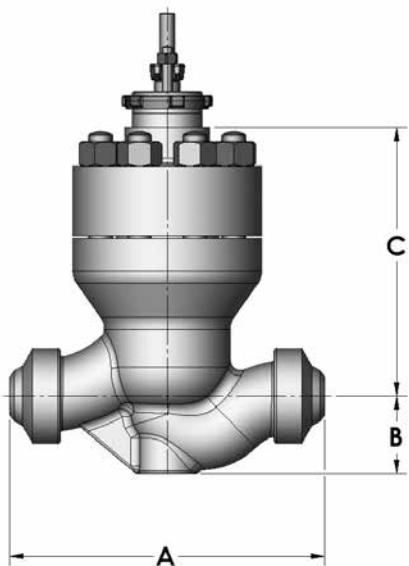

Cast Angle Style

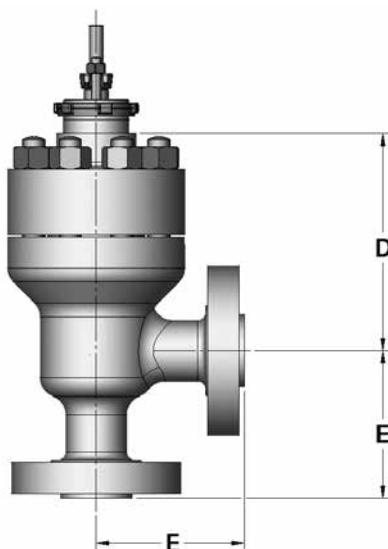

18400/78400 Series Cast Body Dimensions (inches)


ASME Class 600 through 2500 and equivalent PN

| Valve Size (inches) | A | | | | | | | | | | | | | |
|------------------------|--------------------|----------|-----------------|----------|-----------------|----------|----------------|-------|----------------|-------|-----------------|-------|-----------------|-------|
| | ASME Class 600-900 | | ASME Class 1500 | | ASME Class 2500 | | ASME Class 600 | | ASME Class 900 | | ASME Class 1500 | | ASME Class 2500 | |
| | BW | SW & THD | BW | SW & THD | BW | SW & THD | RF | RTJ | RF | RTJ | RF | RTJ | RF | RTJ |
| 1 | 7.75 | 7.75 | 7.75 | 7.75 | 8.50 | 8.50 | 11.50 | 11.50 | 11.50 | 11.50 | 11.50 | 11.50 | 12.12 | 12.12 |
| 1.5 | 9.25 | 9.25 | 9.25 | 9.25 | 10.25 | 10.25 | 12.25 | 12.25 | 12.25 | 12.25 | 12.25 | 12.25 | 14.12 | 14.12 |
| 2 | 14.75 | 14.75 | 14.75 | 14.75 | 14.75 | 14.75 | 14.75 | 14.87 | 14.75 | 14.87 | 14.75 | 14.87 | 16.25 | 16.37 |
| 3 | 17.38 | | 18.12 | | 19.62 | | 17.38 | 17.50 | 17.38 | 17.50 | 18.12 | 18.24 | 19.62 | 19.75 |
| 4 | 20.12 | | 20.87 | | 22.62 | | 20.12 | 20.25 | 20.12 | 20.25 | 20.87 | 21.00 | 29.00 | 29.38 |
| 6 | 30.25 | | 30.25 | | 32.25 | | 30.25 | 30.37 | 30.25 | 30.37 | 30.25 | 30.62 | 32.25 | 32.75 |
| 8 | 32.75 | | 32.75 | | 40.25 | | 36.00 | 36.12 | 36.00 | 36.12 | 38.25 | 38.62 | 40.25 | 40.87 |


| Valve Size (inches) | B | | | | | | | |
|------------------------|---------------------|----------|-----------------|----------|----------------|----------------|-----------------|-----------------|
| | ASME Class 600-1500 | | ASME Class 2500 | | ASME Class 600 | ASME Class 900 | ASME Class 1500 | ASME Class 2500 |
| | BW | SW & THD | BW | SW & THD | RF & RTJ | RF & RTJ | RF & RTJ | RF & RTJ |
| 1 | 1.97 | 1.97 | 1.97 | 1.97 | 2.44 | 2.94 | 2.94 | 3.13 |
| 1.5 | 2.62 | 2.62 | 2.62 | 2.62 | 3.06 | 3.50 | 3.50 | 4.00 |
| 2 | 3.64 | 3.64 | 3.64 | 3.64 | 3.25 | 4.25 | 4.25 | 4.63 |
| 3 | 5.31 | | 5.37 | | 4.13 | 4.75 | 5.25 | 6.00 |
| 4 | 6.28 | | 7.07 | | 5.37 | 5.75 | 6.12 | 7.00 |
| 6 | 8.94 | | 8.94 | | 7.00 | 7.50 | 7.75 | 9.50 |
| 8 | 10.63 | | 10.63 | | 8.25 | 9.25 | 9.50 | 10.87 |

Dimensions (inches)

Cast Globe Style

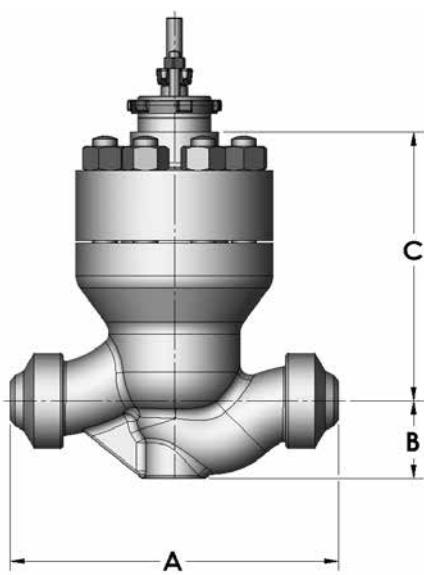

Cast Angle Style

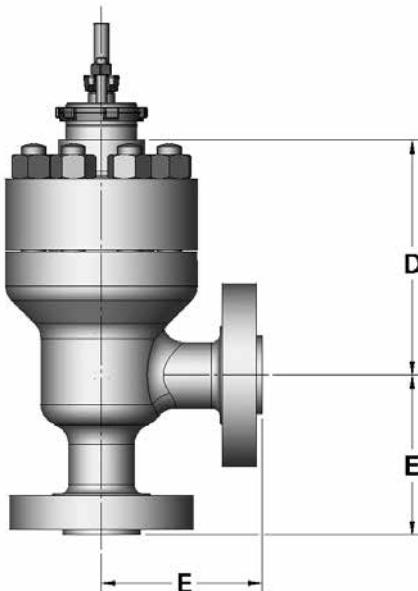

18400/78400 Series Cast Body Dimensions (inches)


ASME Class 600 through 2500 and equivalent PN

| Valve Size (inches) | C | | | | D | | | |
|------------------------|---------------------|---------|---------------------|---------|---------------------|---------|---------------------|---------|
| | Standard Bonnet | | Extension Bonnet | | Standard Bonnet | | Extension Bonnet | |
| | ASME Class 600-2500 | | ASME Class 600-2500 | | ASME Class 600-2500 | | ASME Class 600-2500 | |
| | 3 & 4 Stage | 6 Stage |
| 1 | 8.50 | 9.88 | 12.52 | 13.90 | 7.13 | 8.50 | 11.14 | 12.52 |
| 1.5 | 8.44 | 9.82 | 12.46 | 13.83 | 7.13 | 8.50 | 11.14 | 12.52 |
| 2 | 12.56 | 14.69 | 17.70 | 19.82 | 10.85 | 12.98 | 15.98 | 18.11 |
| 3 | 16.62 | 19.86 | 22.30 | 25.55 | 14.11 | 17.36 | 19.79 | 23.05 |
| 4 | 19.69 | 23.70 | 24.63 | 28.63 | 15.94 | 19.94 | 20.88 | 24.88 |
| 6 | 25.48 | 30.98 | 29.48 | 34.98 | 19.91 | 25.41 | 23.91 | 29.41 |
| 8 | 30.17 | 36.52 | 33.69 | 40.03 | 23.88 | 30.22 | 27.39 | 33.74 |


| Valve Size (inches) | E | | | | | | | | | | | | | |
|---------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|-------------------|-------|-------------------|-------|--------------------|-------|--------------------|-------|
| | ASME Class 600-900 | | ASME Class 1500 | | ASME Class 2500 | | ASME Class 600 | | ASME Class 900 | | ASME Class 1500 | | ASME Class 2500 | |
| | BW | SW & THD | BW | SW & THD | BW | SW & THD | RF | RTJ | RF | RTJ | RF | RTJ | RF | RTJ |
| 1 | 3.87 | 3.87 | 3.87 | 3.87 | 4.25 | 4.25 | 5.75 | 5.75 | 5.75 | 5.75 | 5.75 | 5.75 | 6.06 | 6.06 |
| 1.5 | 4.63 | 4.63 | 4.63 | 4.63 | 5.13 | 5.13 | 6.13 | 6.13 | 6.13 | 6.13 | 6.13 | 6.13 | 7.06 | 7.12 |
| 2 | 7.38 | 7.38 | 7.38 | 7.38 | 7.38 | 7.38 | 7.38 | 7.44 | 7.38 | 7.44 | 7.38 | 7.44 | 8.13 | 8.19 |
| 3 | 8.69 | | 9.06 | | 9.81 | | 8.69 | 8.75 | 8.69 | 8.75 | 9.06 | 9.12 | 9.81 | 9.87 |
| 4 | 10.06 | | 10.44 | | 11.31 | | 10.06 | 10.13 | 10.06 | 10.13 | 10.44 | 10.50 | 14.50 | 14.68 |
| 6 | 15.13 | | 15.13 | | 16.13 | | 15.13 | 15.19 | 15.13 | 15.19 | 15.13 | 15.31 | 16.13 | 16.37 |
| 8 | 16.37 | | 16.37 | | 20.13 | | 18.00 | 18.06 | 18.00 | 18.06 | 19.13 | 19.31 | 20.13 | 20.44 |

Dimensions (inches)

Forged Globe Style

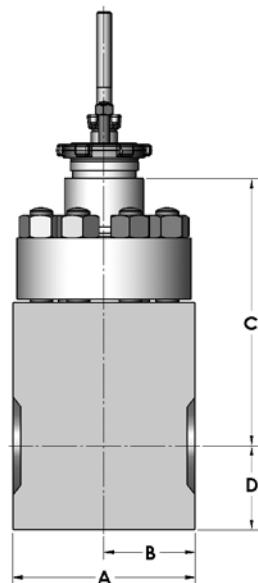

Forged Angle Style

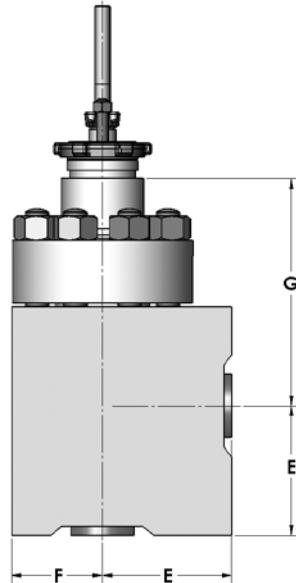

18400F Series Forged Globe Style Body Dimensions (inches)

ASME Class 600 through 2500 and equivalent PN

| Valve Size (inches) | A | | B | | C | | | | D | |
|------------------------|------------------------|-------------|------------------------|-------------|-----------------|---------|------------------|---------|------------------------|------|
| | ASME Class 600-2500 | | ASME Class 600-2500 | | Standard Bonnet | | Extension Bonnet | | ASME Class 600-2500 | |
| | RF, RTJ & BW | SW & THD | RF, RTJ & BW | SW & THD | 3 & 4 STAGE | 6 STAGE | 3 & 4 STAGE | 6 STAGE | | |
| 1 | 6.00 | 6.00 | 3.00 | 3.00 | 8.82 | 10.20 | 11.26 | 14.22 | 2.78 | 2.78 |
| 1.5 | 8.50 | 8.50 | 4.25 | 4.25 | 9.61 | 10.98 | 13.62 | 15.00 | 3.49 | 3.49 |
| 2 | 10.00 | 10.00 | 5.00 | 5.00 | 13.43 | 15.55 | 18.56 | 20.69 | 3.76 | 3.76 |
| 3 | 13.50 | | 6.75 | | 18.18 | 21.43 | 23.85 | 27.10 | 5.59 | |
| 4 | 18.00 | | 9.00 | | 21.70 | 25.70 | 26.63 | 30.64 | 6.25 | |
| 6 | 24.00 | | 12.00 | | 28.87 | 34.37 | 32.86 | 38.36 | 8.73 | |
| 8 | 36.00 | | 18.00 | | 33.67 | 40.02 | 37.19 | 43.53 | 10.50 | |


78400F Series Forged Angle Style Body Dimensions (inches)

ASME Class 600 through 2500 and equivalent PN


| Valve Size (inches) | E | | F | | G | | | |
|------------------------|------------------------|----------|------------------------|----------|-----------------|---------|------------------|---------|
| | ASME Class 600-2500 | | ASME Class 600-2500 | | Standard Bonnet | | Extension Bonnet | |
| | RF, RTJ & BW | SW & THD | RF, RTJ & BW | SW & THD | 3 & 4 STAGE | 6 STAGE | 3 & 4 STAGE | 6 STAGE |
| 1 | 4.12 | 4.12 | 2.89 | 2.89 | 7.24 | 8.62 | 11.26 | 12.63 |
| 1.5 | 4.94 | 4.94 | 3.56 | 3.56 | 7.15 | 8.53 | 11.17 | 12.55 |
| 2 | 5.75 | 5.75 | 4.49 | 4.49 | 10.61 | 12.36 | 15.57 | 17.50 |
| 3 | 7.50 | | 53.50 | | 13.61 | 16.88 | 19.32 | 22.59 |
| 4 | 9.00 | | 6.50 | | 15.95 | 19.95 | 20.89 | 24.89 |
| 6 | 12.00 | | 8.50 | | 18.60 | 24.11 | 22.59 | 28.11 |
| 8 | 14.00 | | 10.25 | | 24.70 | 31.04 | 28.22 | 34.56 |

Dimensions (mm)

Cast Globe Style

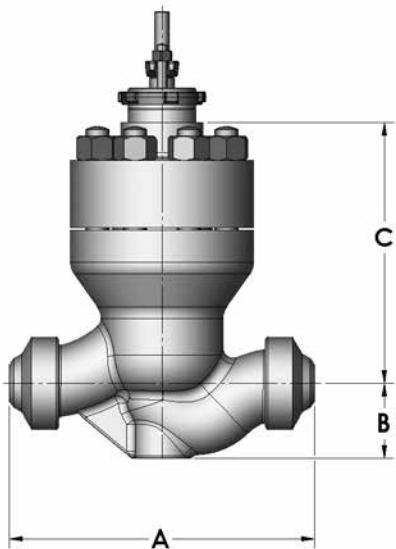

Cast Angle Style

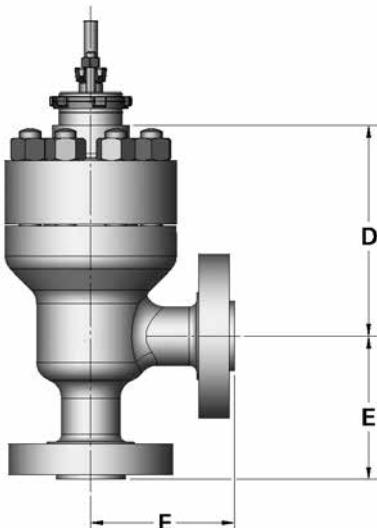

18400/78400 Series Cast Body Dimensions (mm)


ASME Class 600 through 2500 and equivalent PN

| Valve Size (inches) | A | | | | | | | | | | | | | |
|---------------------|--------------------|----------|-----|----------|-----------------|----------|-----|-----|----------------|-----|-----------------|-----|-----------------|------|
| | ASME Class 600-900 | | | | ASME Class 2500 | | | | ASME Class 900 | | ASME Class 1500 | | ASME Class 2500 | |
| | BW | SW & THD | BW | SW & THD | BW | SW & THD | RF | RTJ | RF | RTJ | RF | RTJ | RF | RTJ |
| 1 | 197 | 197 | 197 | 197 | 216 | 216 | 292 | 292 | 292 | 292 | 292 | 292 | 308 | 308 |
| 1.5 | 235 | 235 | 235 | 235 | 260 | 260 | 311 | 311 | 311 | 311 | 311 | 311 | 359 | 359 |
| 2 | 375 | 375 | 375 | 375 | 375 | 375 | 375 | 378 | 375 | 378 | 375 | 378 | 413 | 416 |
| 3 | 441 | | 460 | | 498 | | 441 | 455 | 441 | 445 | 460 | 463 | 498 | 502 |
| 4 | 511 | | 530 | | 575 | | 511 | 514 | 511 | 514 | 530 | 533 | 737 | 746 |
| 6 | 768 | | 769 | | 819 | | 768 | 771 | 768 | 771 | 768 | 778 | 819 | 832 |
| 8 | 832 | | 832 | | 1022 | | 914 | 917 | 914 | 917 | 972 | 981 | 1022 | 1038 |


| Valve Size (inches) | B | | | | | | | |
|---------------------|---------------------|----------|---------------------|----------|----------------|----------------|-----------------|-----------------|
| | ASME Class 600-2500 | | ASME Class 600-2500 | | ASME Class 600 | ASME Class 900 | ASME Class 1500 | ASME Class 2500 |
| | BW | SW & THD | BW | SW & THD | RF & RTJ | RF & RTJ | RF & RTJ | RF & RTJ |
| 1 | 50 | 50 | 50 | 50 | 62 | 75 | 75 | 80 |
| 1.5 | 67 | 67 | 67 | 67 | 78 | 89 | 89 | 102 |
| 2 | 92 | 92 | 92 | 92 | 83 | 108 | 108 | 118 |
| 3 | 135 | | 136 | | 105 | 121 | 133 | 152 |
| 4 | 160 | | 180 | | 136 | 146 | 155 | 178 |
| 6 | 227 | | 227 | | 178 | 191 | 197 | 241 |
| 8 | 270 | | 270 | | 210 | 235 | 241 | 276 |

Dimensions (mm)

Cast Globe Style

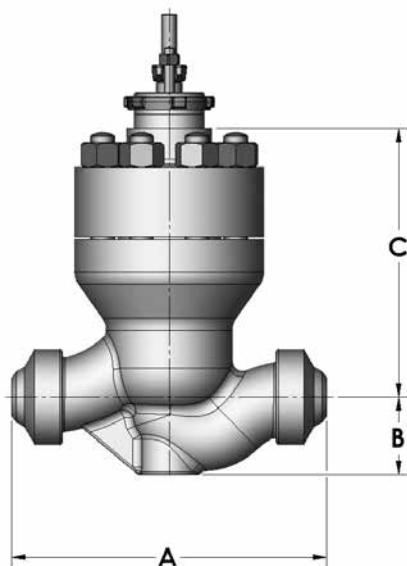

Cast Angle Style

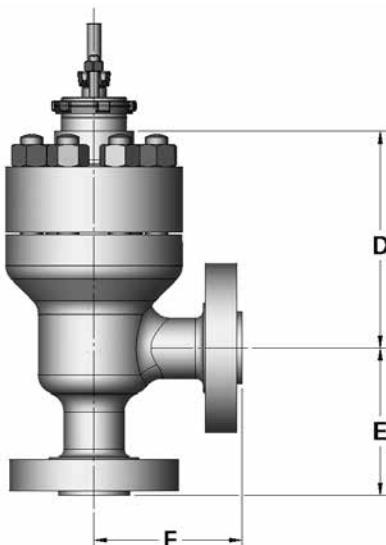

18400/78400 Series Cast Body Dimensions (mm)


ASME Class 600 through 2500 and equivalent PN

| Valve Size (inches) | C | | | | D | | | |
|------------------------|---------------------|---------|---------------------|---------|---------------------|---------|---------------------|---------|
| | Standard Bonnet | | Extension Bonnet | | Standard Bonnet | | Extension Bonnet | |
| | ASME Class 600-2500 | | ASME Class 600-2500 | | ASME Class 600-2500 | | ASME Class 600-2500 | |
| | 3 & 4 Stage | 6 Stage |
| 1 | 216 | 251 | 318 | 353 | 181 | 216 | 283 | 318 |
| 1.5 | 214 | 249 | 316 | 351 | 181 | 216 | 283 | 318 |
| 2 | 319 | 373 | 450 | 503 | 276 | 330 | 406 | 460 |
| 3 | 422 | 504 | 566 | 649 | 358 | 441 | 503 | 585 |
| 4 | 500 | 602 | 626 | 727 | 405 | 506 | 530 | 632 |
| 6 | 647 | 787 | 749 | 888 | 506 | 645 | 607 | 747 |
| 8 | 766 | 928 | 856 | 1017 | 607 | 768 | 696 | 857 |


| Valve Size (inches) | E | | | | | | | | | | | | | |
|------------------------|--------------------|----------|-----------------|----------|-----------------|----------|----------------|-----|----------------|-----|-----------------|-----|-----------------|-----|
| | ASME Class 600-900 | | ASME Class 1500 | | ASME Class 2500 | | ASME Class 600 | | ASME Class 900 | | ASME Class 1500 | | ASME Class 2500 | |
| | BW | SW & THD | BW | SW & THD | BW | SW & THD | RF | RTJ | RF | RTJ | RF | RTJ | RF | RTJ |
| 1 | 98 | 98 | 98 | 98 | 108 | 108 | 146 | 146 | 146 | 146 | 146 | 146 | 154 | 154 |
| 1.5 | 118 | 118 | 118 | 118 | 130 | 130 | 156 | 156 | 156 | 156 | 156 | 156 | 179 | 181 |
| 2 | 187 | 187 | 187 | 187 | 187 | 187 | 187 | 189 | 187 | 189 | 187 | 189 | 207 | 208 |
| 3 | 221 | | 230 | | 249 | | 221 | 222 | 221 | 222 | 230 | 232 | 249 | 251 |
| 4 | 256 | | 265 | | 287 | | 256 | 257 | 256 | 257 | 265 | 267 | 368 | 373 |
| 6 | 384 | | 384 | | 410 | | 384 | 386 | 384 | 386 | 384 | 389 | 410 | 416 |
| 8 | 416 | | 416 | | 511 | | 457 | 459 | 457 | 459 | 486 | 490 | 511 | 519 |

Dimensions (mm)

Forged Globe Style

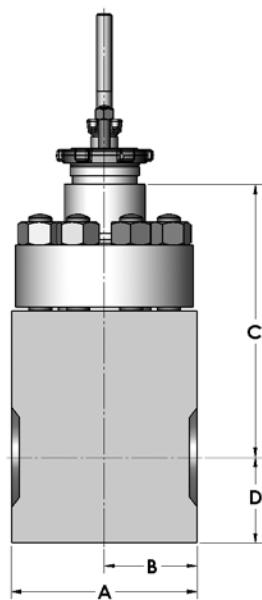

Forged Angle Style

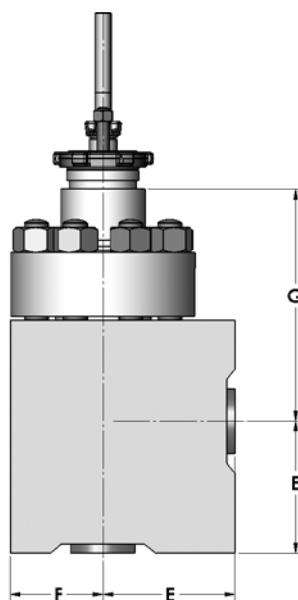

18400F Series Forged Globe Style Body Dimensions (mm)

ASME Class 600 through 2500 and equivalent PN

| Valve Size (inches) | A | | B | | C | | | | D | |
|------------------------|------------------------|----------|------------------------|----------|-----------------|---------|------------------|---------|------------------------|----|
| | ASME Class 600-2500 | | ASME Class 600-2500 | | Standard Bonnet | | Extension Bonnet | | ASME Class 600-2500 | |
| | RF, RTJ & BW | SW & THD | RF, RTJ & BW | SW & THD | 3 & 4 STAGE | 6 STAGE | 3 & 4 STAGE | 6 STAGE | | |
| 1 | 152 | 152 | 76 | 76 | 224 | 259 | 286 | 361 | 71 | 71 |
| 1.5 | 216 | 216 | 108 | 108 | 244 | 279 | 346 | 381 | 89 | 89 |
| 2 | 254 | 254 | 127 | 127 | 341 | 395 | 471 | 526 | 96 | 96 |
| 3 | 343 | | 171 | | 462 | 544 | 606 | 688 | 142 | |
| 4 | 457 | | 229 | | 551 | 653 | 676 | 778 | 159 | |
| 6 | 610 | | 305 | | 733 | 873 | 835 | 974 | 222 | |
| 8 | 914 | | 457 | | 855 | 1017 | 945 | 1106 | 267 | |

78400F Series Forged Angle Style Body Dimensions (mm)

ASME Class 600 through 2500 and equivalent PN

| Valve Size (inches) | E | | F | | G | | | |
|------------------------|------------------------|----------|------------------------|----------|-----------------|---------|------------------|---------|
| | ASME Class 600-2500 | | ASME Class 600-2500 | | Standard Bonnet | | Extension Bonnet | |
| | RF, RTJ & BW | SW & THD | RF, RTJ & BW | SW & THD | 3 & 4 STAGE | 6 STAGE | 3 & 4 STAGE | 6 STAGE |
| 1 | 105 | 105 | 73 | 73 | 184 | 219 | 286 | 321 |
| 1.5 | 125 | 125 | 90 | 90 | 182 | 217 | 284 | 319 |
| 2 | 146 | 146 | 114 | 114 | 269 | 314 | 395 | 445 |
| 3 | 191 | | 140 | | 346 | 429 | 491 | 574 |
| 4 | 229 | | 165 | | 405 | 507 | 531 | 632 |
| 6 | 305 | | 216 | | 472 | 612 | 574 | 714 |
| 8 | 356 | | 260 | | 627 | 788 | 717 | 878 |

Weights (lbs)

18400 Series Cast Globe Body S/A with Standard Bonnet (lbs)

| Valve Size (inches) | 3 & 4 Stage Design | | | | | | | |
|------------------------|---------------------|----------|-----------------|----------|----------------|----------------|-----------------|-----------------|
| | ASME Class 600-2500 | | ASME Class 2500 | | ASME Class 600 | ASME Class 900 | ASME Class 1500 | ASME Class 2500 |
| | BW | SW & THD | BW | SW & THD | RF & RTJ | RF & RTJ | RF & RTJ | RF & RTJ |
| 1 | 44 | 45 | 46 | 46 | 52 | 61 | 61 | 68 |
| 1.5 | 47 | 48 | 51 | 52 | 62 | 73 | 73 | 97 |
| 2 | 167 | 169 | 182 | 185 | 179 | 206 | 206 | 242 |
| 3 | 244 | | 293 | | 264 | 284 | 311 | 420 |
| 4 | 440 | | 565 | | 481 | 500 | 534 | 804 |
| 6 | 1104 | | 1275 | | 1215 | 1262 | 1332 | 1794 |
| 8 | 2204 | | 2745 | | 2401 | 2501 | 2661 | 3490 |

| Valve Size (inches) | 6 Stage Design | | | | | | | |
|------------------------|---------------------|----------|-----------------|----------|----------------|----------------|-----------------|-----------------|
| | ASME Class 600-2500 | | ASME Class 2500 | | ASME Class 600 | ASME Class 900 | ASME Class 1500 | ASME Class 2500 |
| | BW | SW & THD | BW | SW & THD | RF & RTJ | RF & RTJ | RF & RTJ | RF & RTJ |
| 1 | 47 | 47 | 48 | 48 | 55 | 64 | 64 | 70 |
| 1.5 | 51 | 52 | 55 | 55 | 65 | 76 | 76 | 101 |
| 2 | 176 | 178 | 194 | 197 | 189 | 214 | 216 | 254 |
| 3 | 278 | | 331 | | 298 | 320 | 345 | 457 |
| 4 | 499 | | 631 | | 541 | 559 | 594 | 866 |
| 6 | 1287 | | 1518 | | 1398 | 1445 | 1514 | 2036 |
| 8 | 2513 | | 3206 | | 2714 | 2813 | 2966 | 3950 |

18400 Series Cast Globe Body S/A with Extension Bonnet (lbs)

| Valve Size (inches) | 3 & 4 Stage Design | | | | | | | |
|------------------------|---------------------|----------|-----------------|----------|----------------|----------------|-----------------|-----------------|
| | ASME Class 600-2500 | | ASME Class 2500 | | ASME Class 600 | ASME Class 900 | ASME Class 1500 | ASME Class 2500 |
| | BW | SW & THD | BW | SW & THD | RF & RTJ | RF & RTJ | RF & RTJ | RF & RTJ |
| 1 | 50 | 51 | 52 | 52 | 59 | 67 | 67 | 74 |
| 1.5 | 53 | 54 | 57 | 57 | 68 | 78 | 78 | 103 |
| 2 | 185 | 186 | 198 | 203 | 197 | 223 | 223 | 260 |
| 3 | 258 | | 307 | | 278 | 298 | 325 | 434 |
| 4 | 461 | | 585 | | 503 | 521 | 556 | 825 |
| 6 | 1137 | | 1307 | | 1249 | 1296 | 1365 | 1828 |
| 8 | 2275 | | 2815 | | 2473 | 2572 | 2732 | 3560 |

| Valve Size (inches) | 6 Stage Design | | | | | | | |
|------------------------|---------------------|----------|-----------------|----------|----------------|----------------|-----------------|-----------------|
| | ASME Class 600-2500 | | ASME Class 2500 | | ASME Class 600 | ASME Class 900 | ASME Class 1500 | ASME Class 2500 |
| | BW | SW & THD | BW | SW & THD | RF & RTJ | RF & RTJ | RF & RTJ | RF & RTJ |
| 1 | 52 | 53 | 54 | 54 | 61 | 70 | 70 | 76 |
| 1.5 | 57 | 57 | 61 | 61 | 71 | 82 | 82 | 107 |
| 2 | 194 | 196 | 210 | 215 | 207 | 232 | 232 | 271 |
| 3 | 292 | | 343 | | 312 | 334 | 359 | 472 |
| 4 | 525 | | 651 | | 566 | 585 | 619 | 892 |
| 6 | 1320 | | 1550 | | 1431 | 1478 | 1548 | 2070 |
| 8 | 2584 | | 3278 | | 2785 | 2884 | 3036 | 4020 |

Weights (lbs)

78400 Series Cast Angle Body S/A with Standard Bonnet (lbs)

| Valve Size (inches) | 3 & 4 Stage Design | | | | | | | |
|------------------------|---------------------|----------|-----------------|----------|----------------|----------------|-----------------|-----------------|
| | ASME Class 600-2500 | | ASME Class 2500 | | ASME Class 600 | ASME Class 900 | ASME Class 1500 | ASME Class 2500 |
| | BW | SW & THD | BW | SW & THD | RF & RTJ | RF & RTJ | RF & RTJ | RF & RTJ |
| 1 | 42 | 44 | 43 | 44 | 51 | 60 | 60 | 66 |
| 1.5 | 46 | 48 | 48 | 49 | 60 | 71 | 71 | 94 |
| 2 | 159 | 164 | 172 | 176 | 172 | 197 | 198 | 233 |
| 3 | 230 | | 272 | | 250 | 269 | 297 | 405 |
| 4 | 421 | | 457 | | 462 | 481 | 516 | 750 |
| 6 | 1029 | | 1114 | | 1140 | 1187 | 1256 | 1691 |
| 8 | 2070 | | 2423 | | 2271 | 2370 | 2530 | 3354 |

| Valve Size (inches) | 6 Stage Design | | | | | | | |
|------------------------|---------------------|----------|-----------------|----------|----------------|----------------|-----------------|-----------------|
| | ASME Class 600-2500 | | ASME Class 2500 | | ASME Class 600 | ASME Class 900 | ASME Class 1500 | ASME Class 2500 |
| | BW | SW & THD | BW | SW & THD | RF & RTJ | RF & RTJ | RF & RTJ | RF & RTJ |
| 1 | 45 | 46 | 46 | 46 | 53 | 62 | 62 | 69 |
| 1.5 | 49 | 51 | 52 | 52 | 64 | 74 | 74 | 98 |
| 2 | 169 | 174 | 183 | 187 | 182 | 208 | 208 | 244 |
| 3 | 264 | | 310 | | 284 | 304 | 331 | 443 |
| 4 | 481 | | 543 | | 522 | 540 | 576 | 815 |
| 6 | 1214 | | 1355 | | 1322 | 1369 | 1442 | 1934 |
| 8 | 2382 | | 2882 | | 2583 | 2682 | 2843 | 3814 |

78400 Series Cast Angle Body S/A with Extension Bonnet (lbs)

| Valve Size (inches) | 3 & 4 Stage Design | | | | | | | |
|------------------------|---------------------|----------|-----------------|----------|----------------|----------------|-----------------|-----------------|
| | ASME Class 600-2500 | | ASME Class 2500 | | ASME Class 600 | ASME Class 900 | ASME Class 1500 | ASME Class 2500 |
| | BW | SW & THD | BW | SW & THD | RF & RTJ | RF & RTJ | RF & RTJ | RF & RTJ |
| 1 | 48 | 50 | 49 | 50 | 57 | 65 | 65 | 72 |
| 1.5 | 51 | 53 | 54 | 54 | 66 | 76 | 76 | 100 |
| 2 | 177 | 180 | 190 | 194 | 189 | 215 | 215 | 250 |
| 3 | 242 | | 287 | | 264 | 284 | 311 | 419 |
| 4 | 443 | | 495 | | 484 | 502 | 538 | 770 |
| 6 | 1063 | | 1145 | | 1173 | 1220 | 1290 | 1725 |
| 8 | 2141 | | 2493 | | 2342 | 2441 | 2601 | 3425 |

| Valve Size (inches) | 6 Stage Design | | | | | | | |
|------------------------|---------------------|----------|-----------------|----------|----------------|----------------|-----------------|-----------------|
| | ASME Class 600-2500 | | ASME Class 2500 | | ASME Class 600 | ASME Class 900 | ASME Class 1500 | ASME Class 2500 |
| | BW | SW & THD | BW | SW & THD | RF & RTJ | RF & RTJ | RF & RTJ | RF & RTJ |
| 1 | 51 | 52 | 52 | 52 | 59 | 68 | 68 | 74 |
| 1.5 | 55 | 56 | 57 | 58 | 69 | 80 | 80 | 104 |
| 2 | 187 | 189 | 201 | 205 | 199 | 225 | 225 | 262 |
| 3 | 276 | | 325 | | 298 | 318 | 345 | 457 |
| 4 | 506 | | 563 | | 547 | 565 | 600 | 841 |
| 6 | 1247 | | 1390 | | 1356 | 1403 | 1475 | 1967 |
| 8 | 2453 | | 2952 | | 2654 | 2754 | 2914 | 3884 |

Weights (kg)

18400 Series Cast Globe Body S/A with Standard Bonnet (kg)

| Valve Size (inches) | 3 & 4 Stage Design | | | | | | | |
|------------------------|---------------------|----------|-----------------|----------|----------------|----------------|-----------------|-----------------|
| | ASME Class 600-2500 | | ASME Class 2500 | | ASME Class 600 | ASME Class 900 | ASME Class 1500 | ASME Class 2500 |
| | BW | SW & THD | BW | SW & THD | RF & RTJ | RF & RTJ | RF & RTJ | RF & RTJ |
| 1 | 20 | 20 | 21 | 21 | 24 | 28 | 28 | 31 |
| 1.5 | 21 | 22 | 23 | 24 | 28 | 33 | 33 | 44 |
| 2 | 76 | 77 | 83 | 84 | 81 | 94 | 94 | 110 |
| 3 | 111 | | 134 | | 120 | 129 | 141 | 191 |
| 4 | 200 | | 258 | | 218 | 227 | 242 | 364 |
| 6 | 501 | | 578 | | 552 | 573 | 605 | 814 |
| 8 | 1001 | | 1246 | | 1090 | 1135 | 1208 | 1582 |

| Valve Size (inches) | 6 Stage Design | | | | | | | |
|------------------------|---------------------|----------|-----------------|----------|----------------|----------------|-----------------|-----------------|
| | ASME Class 600-2500 | | ASME Class 2500 | | ASME Class 600 | ASME Class 900 | ASME Class 1500 | ASME Class 2500 |
| | BW | SW & THD | BW | SW & THD | RF & RTJ | RF & RTJ | RF & RTJ | RF & RTJ |
| 1 | 21 | 21 | 22 | 22 | 25 | 29 | 29 | 32 |
| 1.5 | 23 | 24 | 25 | 25 | 30 | 35 | 35 | 46 |
| 2 | 80 | 81 | 88 | 89 | 86 | 97 | 98 | 115 |
| 3 | 126 | | 151 | | 135 | 145 | 157 | 207 |
| 4 | 227 | | 287 | | 246 | 254 | 270 | 393 |
| 6 | 584 | | 688 | | 635 | 656 | 687 | 924 |
| 8 | 1141 | | 1455 | | 132 | 1277 | 1347 | 1791 |

18400 Series Cast Globe Body S/A with Extension Bonnet (kg)

| Valve Size (inches) | 3 & 4 Stage Design | | | | | | | |
|------------------------|---------------------|----------|-----------------|----------|----------------|----------------|-----------------|-----------------|
| | ASME Class 600-2500 | | ASME Class 2500 | | ASME Class 600 | ASME Class 900 | ASME Class 1500 | ASME Class 2500 |
| | BW | SW & THD | BW | SW & THD | RF & RTJ | RF & RTJ | RF & RTJ | RF & RTJ |
| 1 | 23 | 3 | 24 | 24 | 27 | 30 | 30 | 34 |
| 1.5 | 24 | 36 | 26 | 26 | 31 | 35 | 35 | 47 |
| 2 | 84 | 84 | 90 | 92 | 89 | 101 | 101 | 118 |
| 3 | 117 | | 140 | | 126 | 135 | 148 | 198 |
| 4 | 209 | | 268 | | 228 | 237 | 252 | 373 |
| 6 | 516 | | 594 | | 567 | 588 | 620 | 829 |
| 8 | 1033 | | 1278 | | 1123 | 1168 | 1240 | 1614 |

| Valve Size (inches) | 6 Stage Design | | | | | | | |
|------------------------|---------------------|----------|-----------------|----------|----------------|----------------|-----------------|-----------------|
| | ASME Class 600-2500 | | ASME Class 2500 | | ASME Class 600 | ASME Class 900 | ASME Class 1500 | ASME Class 2500 |
| | BW | SW & THD | BW | SW & THD | RF & RTJ | RF & RTJ | RF & RTJ | RF & RTJ |
| 1 | 24 | 24 | 25 | 25 | 28 | 32 | 32 | 35 |
| 1.5 | 26 | 26 | 28 | 28 | 32 | 37 | 37 | 49 |
| 2 | 88 | 89 | 95 | 98 | 94 | 105 | 105 | 123 |
| 3 | 133 | | 157 | | 142 | 163 | 163 | 214 |
| 4 | 238 | | 297 | | 257 | 281 | 281 | 405 |
| 6 | 599 | | 703 | | 650 | 703 | 703 | 940 |
| 8 | 1173 | | 1490 | | 1264 | 1378 | 1378 | 1823 |

Weights (kg)

78400 Series Cast Angle Body S/A with Standard Bonnet (kg)

| Valve Size (inches) | 3 & 4 Stage Design | | | | | | | |
|------------------------|---------------------|----------|-----------------|----------|----------------|----------------|-----------------|-----------------|
| | ASME Class 600-2500 | | ASME Class 2500 | | ASME Class 600 | ASME Class 900 | ASME Class 1500 | ASME Class 2500 |
| | BW | SW & THD | BW | SW & THD | RF & RTJ | RF & RTJ | RF & RTJ | RF & RTJ |
| 1 | 19 | 20 | 20 | 20 | 23 | 27 | 27 | 30 |
| 1.5 | 21 | 22 | 22 | 22 | 27 | 32 | 32 | 43 |
| 2 | 72 | 74 | 78 | 80 | 78 | 89 | 90 | 106 |
| 3 | 104 | | 124 | | 114 | 122 | 135 | 184 |
| 4 | 191 | | 216 | | 210 | 218 | 234 | 341 |
| 6 | 467 | | 506 | | 518 | 539 | 570 | 767 |
| 8 | 940 | | 1098 | | 1031 | 1076 | 1149 | 1521 |

| Valve Size (inches) | 6 Stage Design | | | | | | | |
|------------------------|---------------------|----------|-----------------|----------|----------------|----------------|-----------------|-----------------|
| | ASME Class 600-2500 | | ASME Class 2500 | | ASME Class 600 | ASME Class 900 | ASME Class 1500 | ASME Class 2500 |
| | BW | SW & THD | BW | SW & THD | RF & RTJ | RF & RTJ | RF & RTJ | RF & RTJ |
| 1 | 20 | 21 | 21 | 21 | 24 | 28 | 28 | 31 |
| 1.5 | 22 | 23 | 24 | 24 | 29 | 34 | 34 | 44 |
| 2 | 77 | 79 | 83 | 85 | 83 | 94 | 94 | 111 |
| 3 | 120 | | 141 | | 129 | 138 | 150 | 210 |
| 4 | 218 | | 245 | | 237 | 245 | 262 | 370 |
| 6 | 551 | | 615 | | 600 | 622 | 655 | 877 |
| 8 | 1081 | | 1308 | | 1173 | 1218 | 1291 | 1730 |

78400 Series Cast Angle Body S/A with Extension Bonnet (kg)

| Valve Size (inches) | 3 & 4 Stage Design | | | | | | | |
|------------------------|---------------------|----------|-----------------|----------|----------------|----------------|-----------------|-----------------|
| | ASME Class 600-2500 | | ASME Class 2500 | | ASME Class 600 | ASME Class 900 | ASME Class 1500 | ASME Class 2500 |
| | BW | SW & THD | BW | SW & THD | RF & RTJ | RF & RTJ | RF & RTJ | RF & RTJ |
| 1 | 22 | 23 | 22 | 23 | 26 | 30 | 30 | 33 |
| 1.5 | 23 | 24 | 25 | 25 | 30 | 35 | 35 | 45 |
| 2 | 80 | 82 | 86 | 88 | 86 | 98 | 98 | 114 |
| 3 | 110 | | 131 | | 120 | 129 | 141 | 191 |
| 4 | 201 | | 226 | | 220 | 228 | 244 | 350 |
| 6 | 483 | | 520 | | 533 | 554 | 586 | 773 |
| 8 | 972 | | 1130 | | 1063 | 1108 | 1181 | 1553 |

| Valve Size (inches) | 6 Stage Design | | | | | | | |
|------------------------|---------------------|----------|-----------------|----------|----------------|----------------|-----------------|-----------------|
| | ASME Class 600-2500 | | ASME Class 2500 | | ASME Class 600 | ASME Class 900 | ASME Class 1500 | ASME Class 2500 |
| | BW | SW & THD | BW | SW & THD | RF & RTJ | RF & RTJ | RF & RTJ | RF & RTJ |
| 1 | 23 | 24 | 24 | 24 | 27 | 31 | 31 | 34 |
| 1.5 | 25 | 25 | 26 | 26 | 31 | 36 | 36 | 47 |
| 2 | 85 | 86 | 91 | 93 | 90 | 102 | 102 | 119 |
| 3 | 125 | | 147 | | 135 | 144 | 157 | 207 |
| 4 | 230 | | 256 | | 248 | 257 | 272 | 381 |
| 6 | 566 | | 631 | | 616 | 637 | 670 | 892 |
| 8 | 1114 | | 1340 | | 1205 | 1250 | 1323 | 1762 |

Weights (lbs & kg)

18400F Series Forged Globe Body S/A

| Valve Size (inches) | Weight (lbs) | | | | Weight (kg) | | | |
|---------------------------|---------------------|---------|---------------------|---------|---------------------|---------|---------------------|---------|
| | Standard Bonnet | | Extension Bonnet | | Standard Bonnet | | Extension Bonnet | |
| | ASME Class 600-2500 | | ASME Class 600-2500 | | ASME Class 600-2500 | | ASME Class 600-2500 | |
| | 3 & 4 Stage | 6 Stage |
| 1 | 86 | 98 | 92 | 104 | 39 | 44 | 42 | 47 |
| 1.5 | 156 | 178 | 162 | 184 | 71 | 81 | 74 | 84 |
| 2 | 344 | 392 | 362 | 410 | 156 | 178 | 164 | 186 |
| 3 | 748 | 874 | 762 | 886 | 340 | 397 | 346 | 402 |
| 4 | 1402 | 1636 | 1424 | 1658 | 637 | 743 | 646 | 753 |
| 6 | 3212 | 3764 | 3242 | 3790 | 1458 | 1709 | 1472 | 1721 |
| 8 | 6960 | 8086 | 7031 | 8132 | 3160 | 3671 | 3192 | 3692 |

78400F Series Forged Angle Body S/A

| Valve Size (inches) | Weight (lbs) | | | | Weight (kg) | | | |
|---------------------------|---------------------|---------|---------------------|---------|---------------------|---------|---------------------|---------|
| | Standard Bonnet | | Extension Bonnet | | Standard Bonnet | | Extension Bonnet | |
| | ASME Class 600-2500 | | ASME Class 600-2500 | | ASME Class 600-2500 | | ASME Class 600-2500 | |
| | 3 & 4 Stage | 6 Stage |
| 1 | 96 | 110 | 102 | 116 | 44 | 50 | 46 | 53 |
| 1.5 | 140 | 162 | 150 | 167 | 64 | 74 | 68 | 76 |
| 2 | 330 | 374 | 350 | 390 | 150 | 170 | 159 | 177 |
| 3 | 626 | 746 | 640 | 758 | 284 | 339 | 291 | 344 |
| 4 | 1060 | 1264 | 1082 | 1286 | 481 | 574 | 491 | 584 |
| 6 | 2120 | 2584 | 2154 | 2610 | 962 | 1173 | 978 | 1185 |
| 8 | 4050 | 4734 | 4122 | 4802 | 1839 | 2149 | 1871 | 2180 |

Accessories and options

- Extension Bonnets
- Environmental Capabilities (Low-E Packing)
- Lubricator & Isolation Valve
- Other Flange Facings
- Limit Stops
- Body Drain Plug
- Reducer and Nipple Connections
- U.O.P. Trim Materials
- High Temperature Materials
- Cryogenic Service Materials
- Electric Actuators

For additional accessories and options, consult Baker Hughes.

Direct Sales Office Locations

Australia

Brisbane
Phone: +61-7-3001-4319

Perth
Phone: +61-8-6595-7018

Melbourne
Phone: +61-3-8807-6002

Brazil
Phone: +55-19-2104-6900

China
Phone: +86-10-5738-8888

France
Courbevoie
Phone: +33-1-4904-9000

India
Mumbai
Phone: +91-22-8354790

New Delhi
Phone: +91-11-2-6164175

Italy

Phone: +39-081-7892-111

Japan
Tokyo
Phone: +81-03-6871-9008

Korea
Phone: +82-2-2274-0748

Malaysia
Phone: +60-3-2161-03228

Mexico
Phone: +52-55-3640-5060

Russia
Veliky Novgorod
Phone: +7-8162-55-7898

Moscow
Phone: +7-495-585-1276

Saudi Arabia
Phone: +966-3-341-0278

Singapore

Phone: +65-6861-6100

South Africa
Phone: +27-11-452-1550

South & Central America and the Caribbean
Phone: +55-12-2134-1201

Spain
Phone: +34-935-877-605

United Arab Emirates
Phone: +971-4-8991-777

United Kingdom
Phone: +44-7919-382-156

United States
Houston, Texas
Phone: +1-713-966-3600

Find the nearest local Channel Partner in your area:

valves.bakerhughes.com/contact-us

Tech Field Support & Warranty:

Phone: +1-866-827-5378
valvesupport@bakerhughes.com

valves.bakerhughes.com

Copyright 2020 Baker Hughes Company. All rights reserved. Baker Hughes provides this information on an "as is" basis for general information purposes. Baker Hughes does not make any representation as to the accuracy or completeness of the information and makes no warranties of any kind, specific, implied or oral, to the fullest extent permissible by law, including those of merchantability and fitness for a particular purpose or use. Baker Hughes hereby disclaims any and all liability for any direct, indirect, consequential or special damages, claims for lost profits, or third party claims arising from the use of the information, whether a claim is asserted in contract, tort, or otherwise. Baker Hughes reserves the right to make changes in specifications and features shown herein, or discontinue the product described at any time without notice or obligation. Contact your Baker Hughes representative for the most current information. The Baker Hughes logo, Masoneilan and LincolnLog are trademarks of Baker Hughes Company. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.

Baker Hughes 